



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-135 230V 1N 50Hz**

Code:

**19037783**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.350,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.455,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>113,00</b>	<b>118,00</b>
Volume	m3	<b>0,80</b>	<b>1,27</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T	<b>2X1,5+T - 4 A</b>	
	230 V. III+T	<b>OPC3X4+T-32A</b>	
	400 V. III+N+T	<b>4X1,5+T - 16 A</b>	
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Consumption - kW-h	365 d.	<b>694</b>
		24 h	<b>1,90</b>
	Net volume - litres	Refrig.	<b>173</b>
	Internal gross capacity	litres	<b>258</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>	<b>SGS-2103-0906-1</b>		
<u>INSTALLATION - CONNECTIONS</u>	<b>Ø</b>		
	► ELECTRICITY		<b>SI</b>

DESCRIPTION

REFRIGERATED COUNTER ADVANCE, EAMFP-135

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 2

Energy efficiency: B

Net capacity: 173 L

Gross capacity: 258 L

Cooling power: 310 W

Electric power: 170 W

Annual energy consumption: 694 kWh/year

Coolant: R-600a

Dimensions: 1350x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-135 230V 1N 50Hz**

Code :  
**19037783**

**SCHEMA - DIMENSIONS**

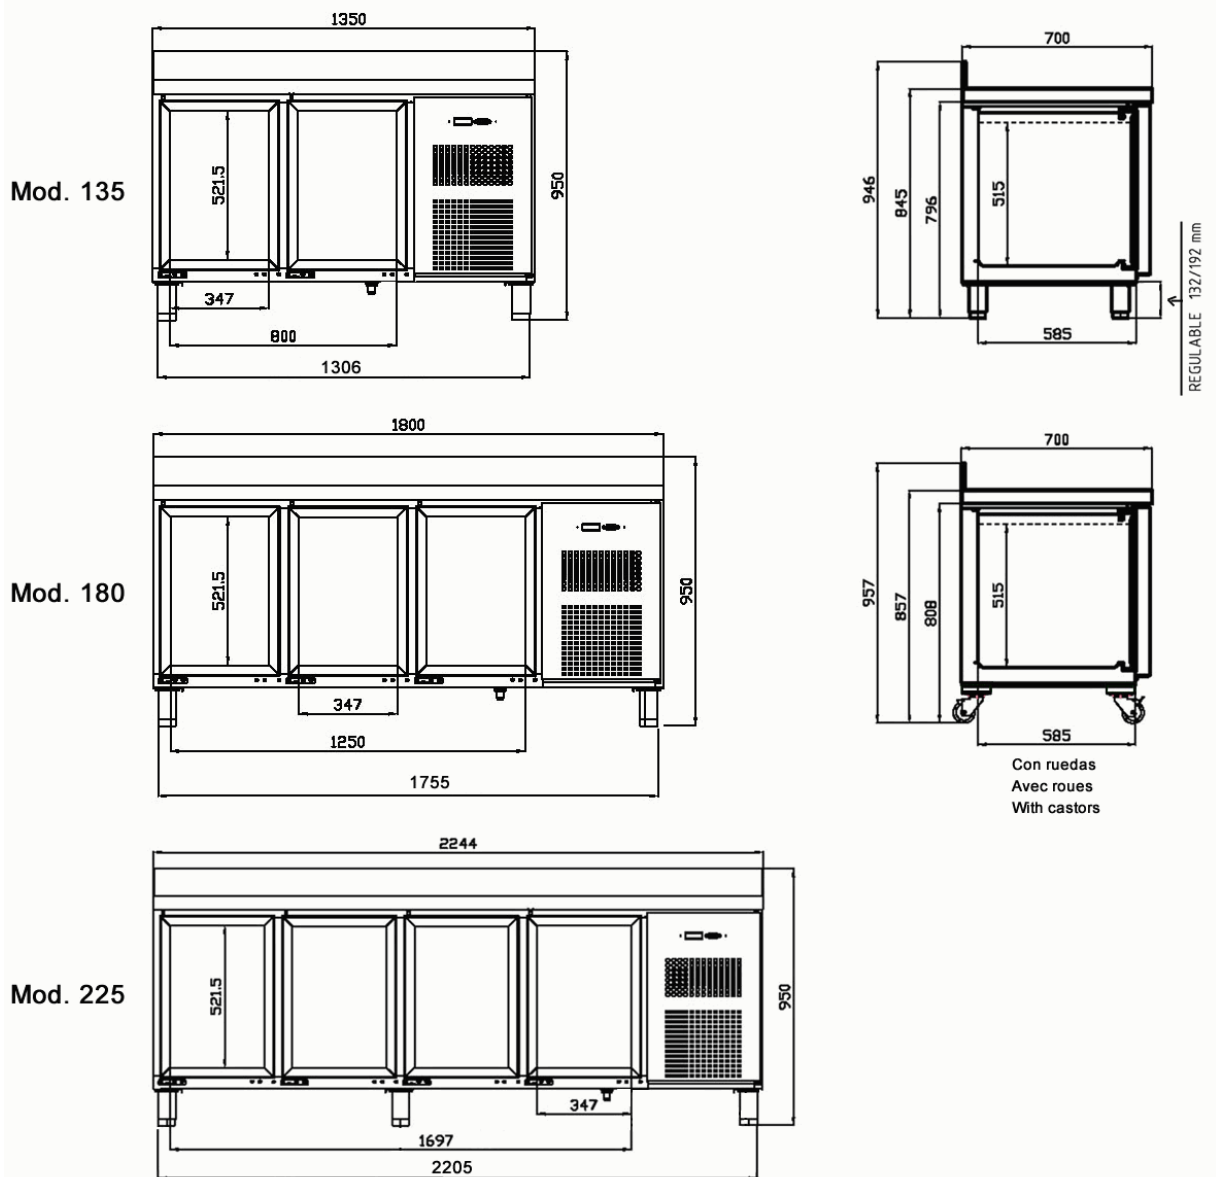



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-180 230V 1N 50Hz**

Code:

**19037784**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.800,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.910,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>141,00</b>	<b>146,00</b>
Volume	m3	<b>1,07</b>	<b>1,67</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T	<b>2X1,5+T - 4 A</b>	
	230 V. III+T		
	400 V. III+N+T	<b>2X(4X6MM2+T)</b>	
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Consumption - kW-h	365 d.	<b>767</b>
		24 h	<b>2,10</b>
	Net volume - litres	Refrig.	<b>261</b>
	Internal gross capacity	litres	<b>403</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>	<b>SGS-2103-0906-1</b>		
<u>INSTALLATION - CONNECTIONS</u>	<b>Ø</b>		
	► ELECTRICITY		<b>SI</b>

DESCRIPTION

REFRIGERATED COUNTER ADVANCE, EAMFP-180

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of door or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 3

Energy efficiency: B

Net capacity: 261 L

Gross capacity: 403 L

Cooling power: 310 W

Electric power: 170 W

Annual energy consumption: 767 kWh/year

Coolant: R-600a

Dimensions: 1800x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-180 230V 1N 50Hz**

Code :  
**19037784**

**SCHEMA - DIMENSIONS**

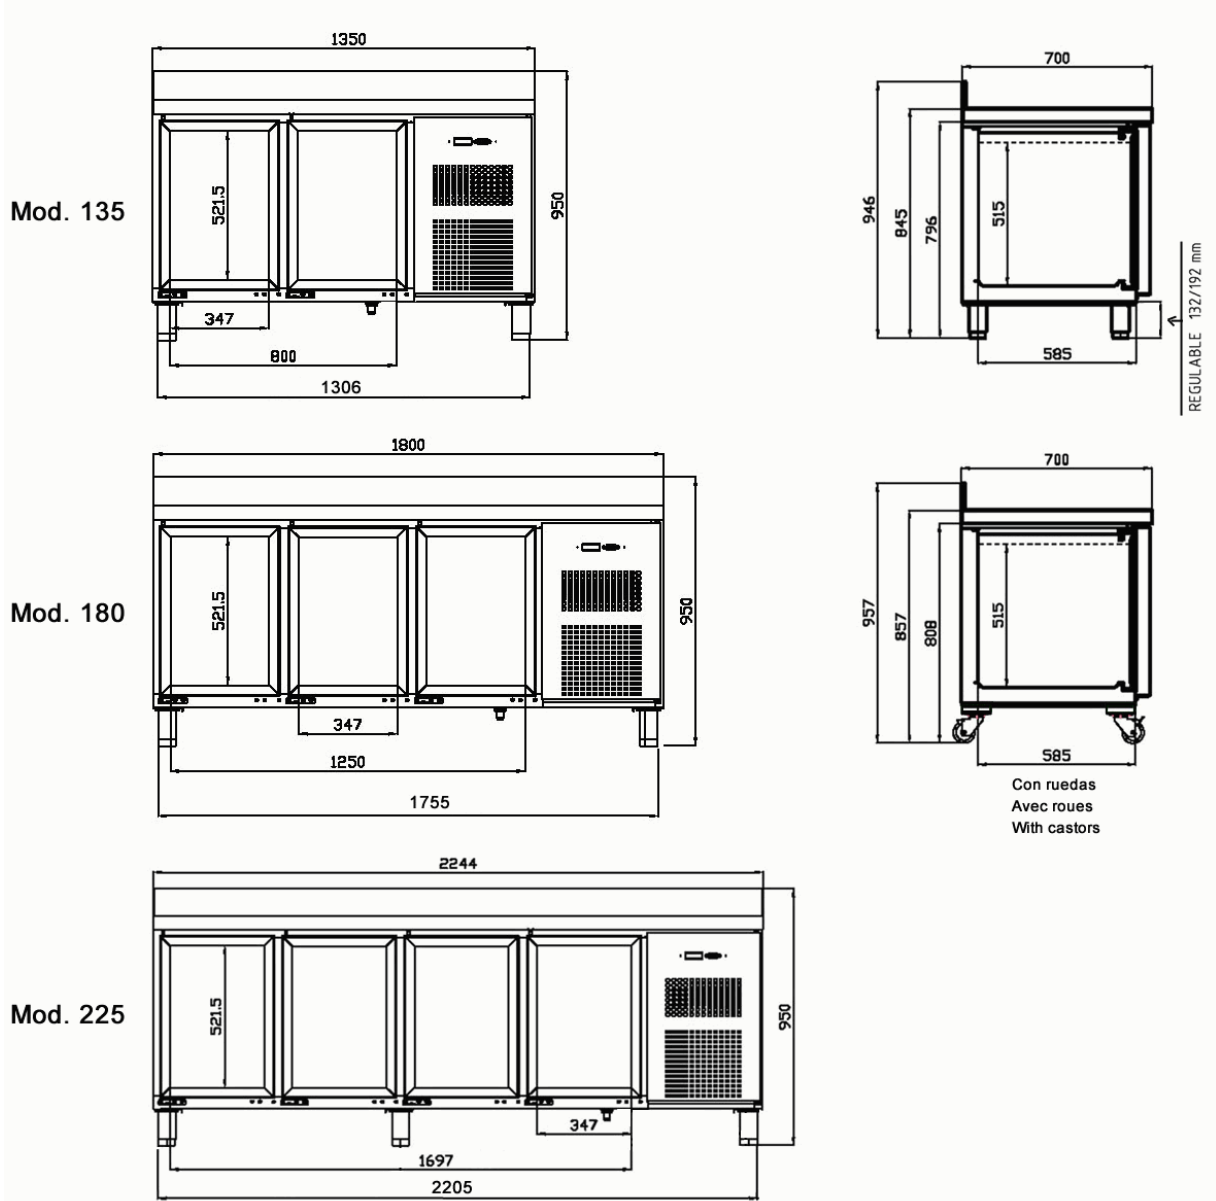



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-225 230V 1N 50Hz**

Code:

**19037785**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>2.250,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>2.353,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>165,00</b>	<b>174,00</b>
Volume	m3	<b>1,34</b>	<b>2,06</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	Power		<b>0,20 kW</b>
Connections	230 V. 1+N+T	<b>2X1,5+T - 4 A</b>	
	230 V. III+T	<b>OPC3X4+T-32A</b>	
	400 V. III+N+T	<b>4X1,5+T - 16 A</b>	
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,357</b>
	Consumption - kW-h	365 d.	<b>810</b>
		24 h	<b>2,22</b>
	Net volume - litres	Refrig.	<b>349</b>
	Internal gross capacity	litres	<b>549</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>	<b>SGS-2103-0906-1</b>		
<u>INSTALLATION - CONNECTIONS</u>	<b>Ø</b>		
	► ELECTRICITY		<b>SI</b>

DESCRIPTION

REFRIGERATED COUNTER ADVANCE, EAMFP-225

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 4

Energy efficiency: B

Net capacity: 349 L

Gross capacity: 549 L

Cooling power: 360 W

Electric power: 200 W

Annual energy consumption: 810 kWh/year

Coolant: R-600a

Dimensions: 2250x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-225 230V 1N 50Hz**

Code :  
**19037785**

**SCHEMA - DIMENSIONS**

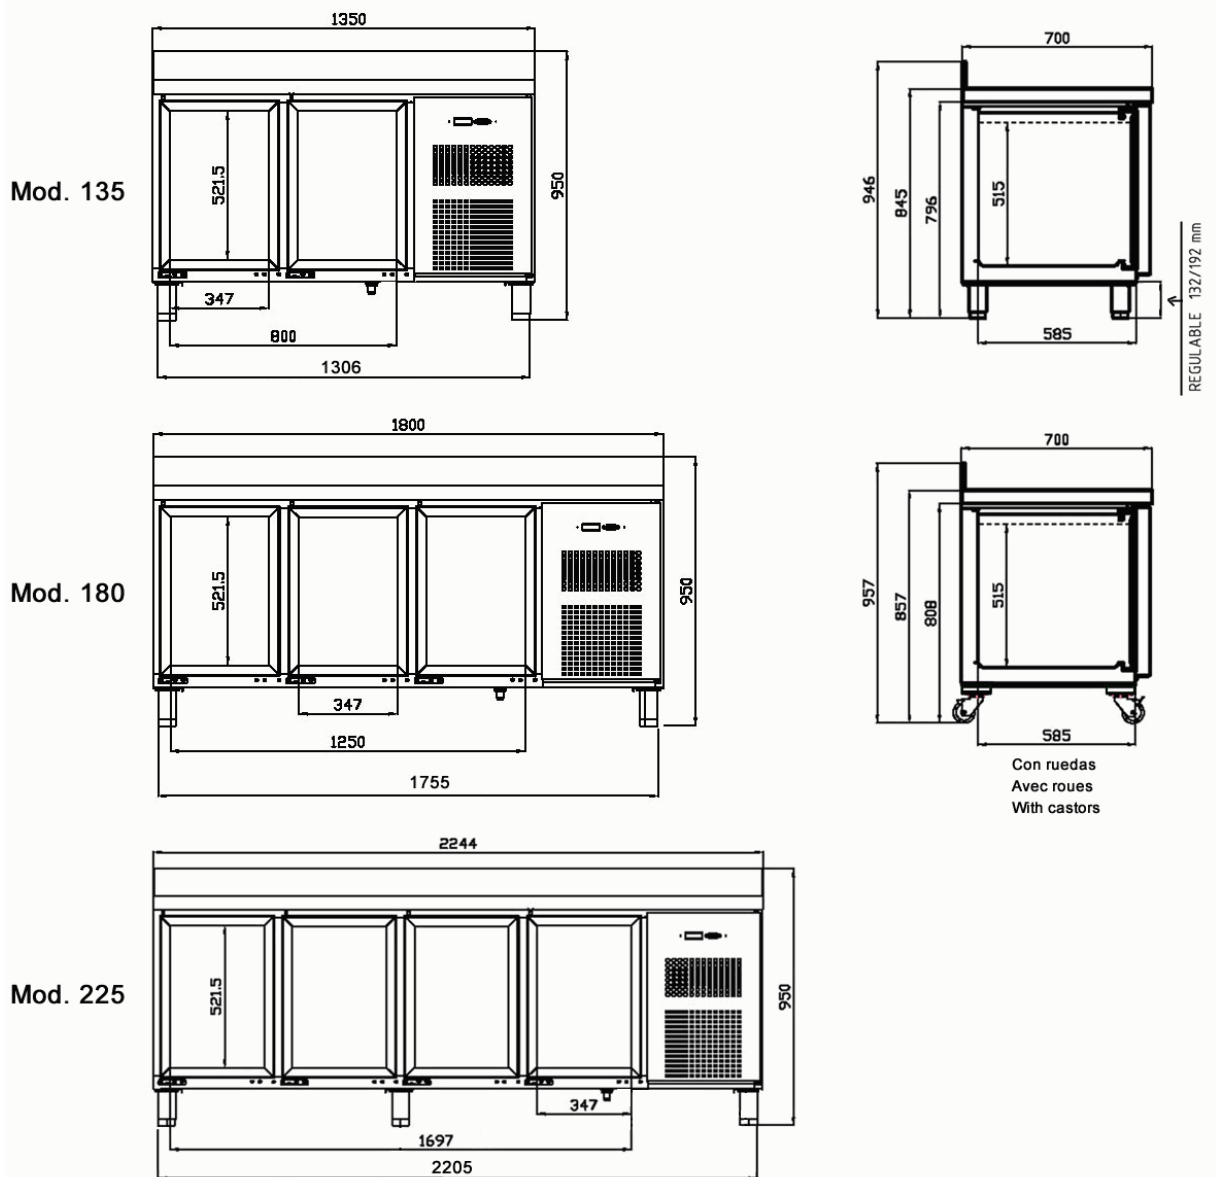



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-135-HD 230V 1N 50Hz**

Code:

**19037786**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.350,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.455,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>127,00</b>	<b>132,00</b>
Volume	m3	<b>0,80</b>	<b>1,27</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Consumption - kW-h	365 d.	<b>694</b>
		24 h	<b>1,90</b>
	Net volume - litres	Refrig.	<b>143</b>
	Internal gross capacity	litres	<b>258</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>		<b>SGS-2103-0906-1</b>	
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-135-HD

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Stainless steel bottom perforated drawers can stand loads up to 40 kg.

Different drawer sets.

- 1 door D = 2 drawers unit H.

- 1 door D = 3 drawers unit T.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 2 cajones 1 puerta

Energy efficiency: B

Net capacity: 143 L

Gross capacity: 258 L

Cooling power: 310 W

Electric power: 170 W

Annual energy consumption: 694 kWh/year

Coolant: R-600a

Dimensions: 1350x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-135-HD 230V 1N 50Hz**

Code :  
**19037786**

**SCHEMA - DIMENSIONS**

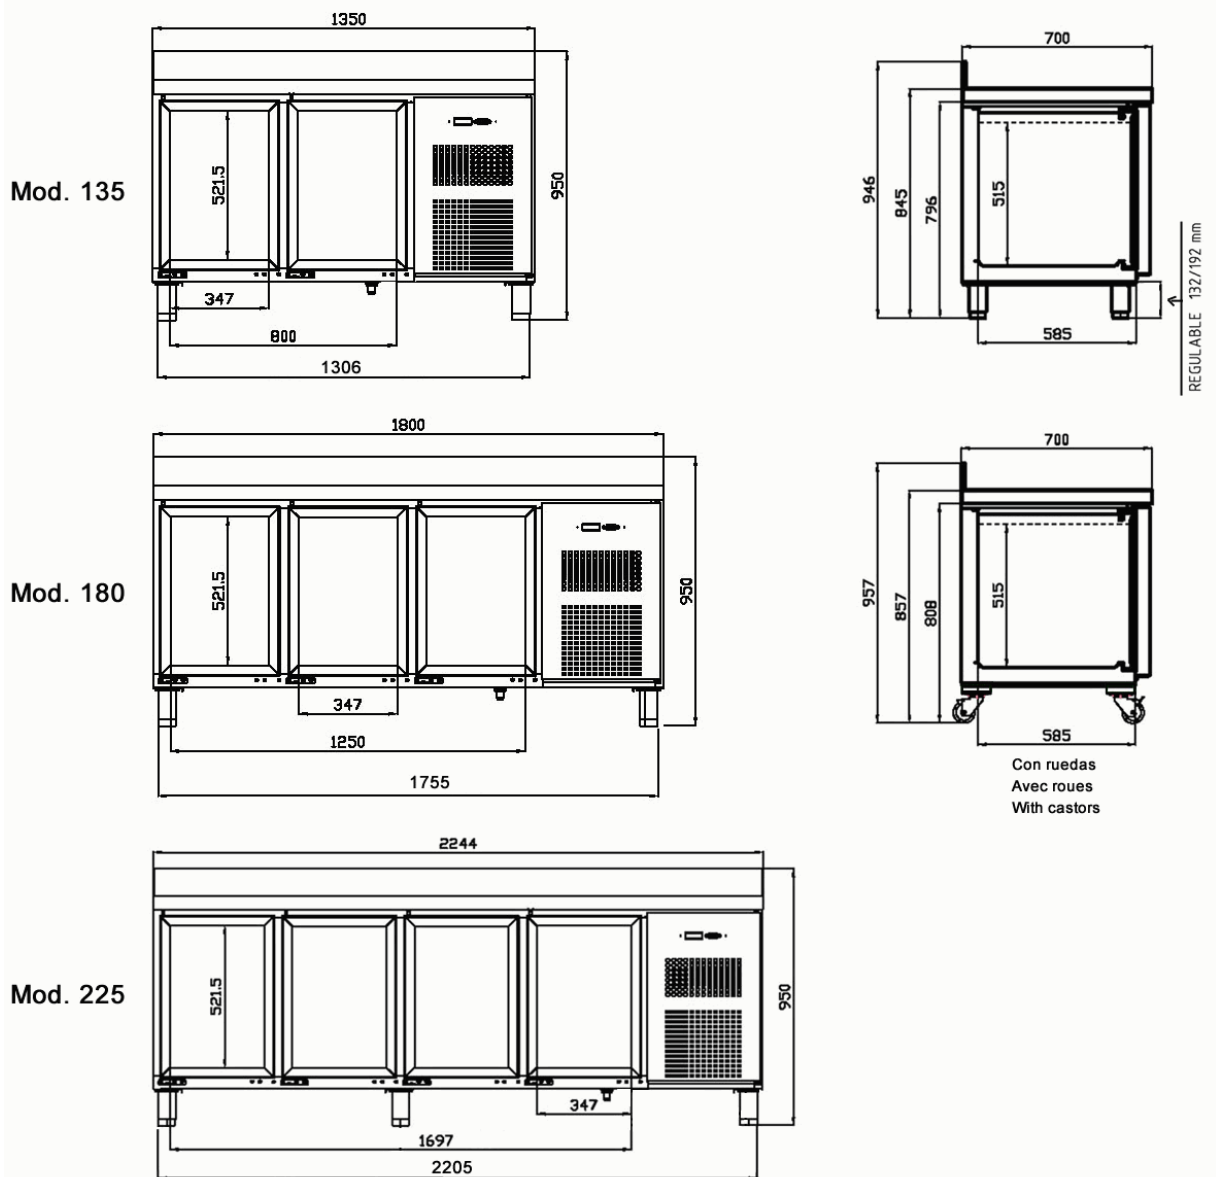





Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-135-HH 230V 1N 50Hz**

Code:

**19037789**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.350,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.455,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>141,00</b>	<b>146,00</b>
Volume	m3	<b>0,80</b>	<b>1,27</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Consumption - kW-h	365 d.	<b>694</b>
		24 h	<b>1,90</b>
	Net volume - litres	Refrig.	<b>112</b>
	Internal gross capacity	litres	<b>258</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>		<b>SGS-2103-0906-1</b>	
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-135-HH

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Stainless steel bottom perforated drawers can stand loads up to 40 kg.

Different drawer sets.

- 1 door D = 2 drawers unit H.

- 1 door D = 3 drawers unit T.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 4 cajones

Energy efficiency: B

Net capacity: 112 L

Gross capacity: 258 L

Cooling power: 310 W

Electric power: 170 W

Annual energy consumption: 694 kWh/year

Coolant: R-600a

Dimensions: 1350x700x850 mm










Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-135-HH 230V 1N 50Hz**

Code :  
**19037789**

**SCHEMA - DIMENSIONS**

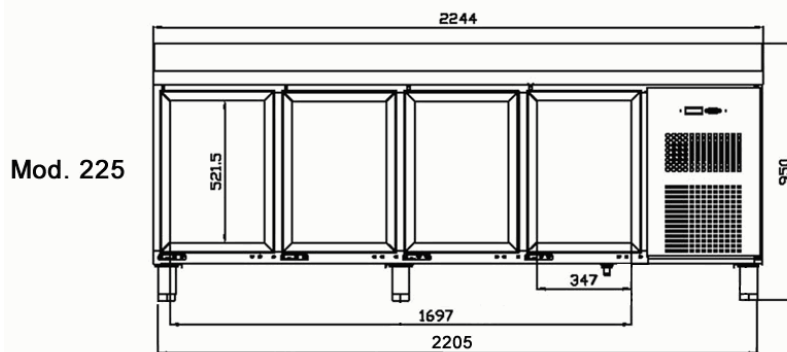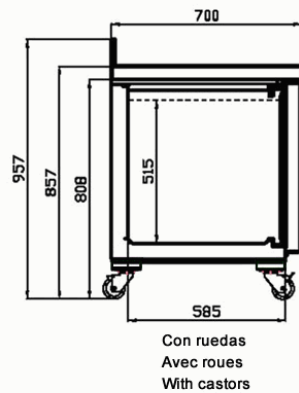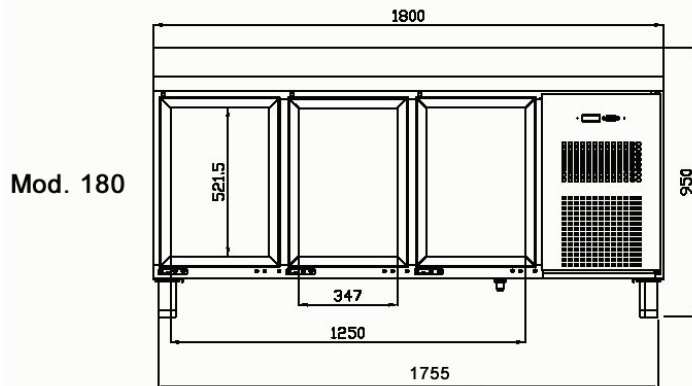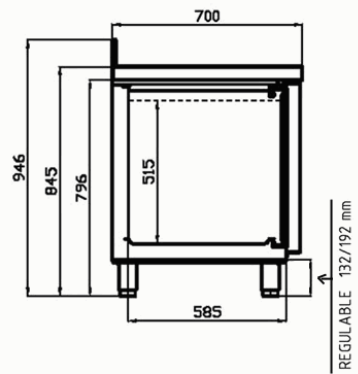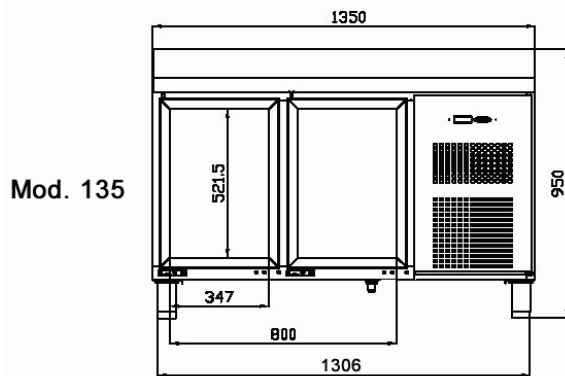



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-180-HDD 230V 1N 50Hz**

Code:

**19037790**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.800,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.910,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>152,00</b>	<b>160,00</b>
Volume	m3	<b>1,07</b>	<b>1,67</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Consumption - kW-h	365 d.	<b>767</b>
		24 h	<b>2,10</b>
	Net volume - litres	Refrig.	<b>230</b>
	Internal gross capacity	litres	<b>403</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-180-HDD

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Stainless steel bottom perforated drawers can stand loads up to 40 kg.

Different drawer sets.

- 1 door D = 2 drawers unit H.

- 1 door D = 3 drawers unit T.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 2 cajones 2 puertas

Energy efficiency: B

Net capacity: 230 L

Gross capacity: 403 L

Cooling power: 310 W

Electric power: 170 W

Annual energy consumption: 767 kWh/year

Coolant: R-600a

Dimensions: 1800x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-180-HDD 230V 1N 50Hz**

Code :  
**19037790**

**SCHEMA - DIMENSIONS**

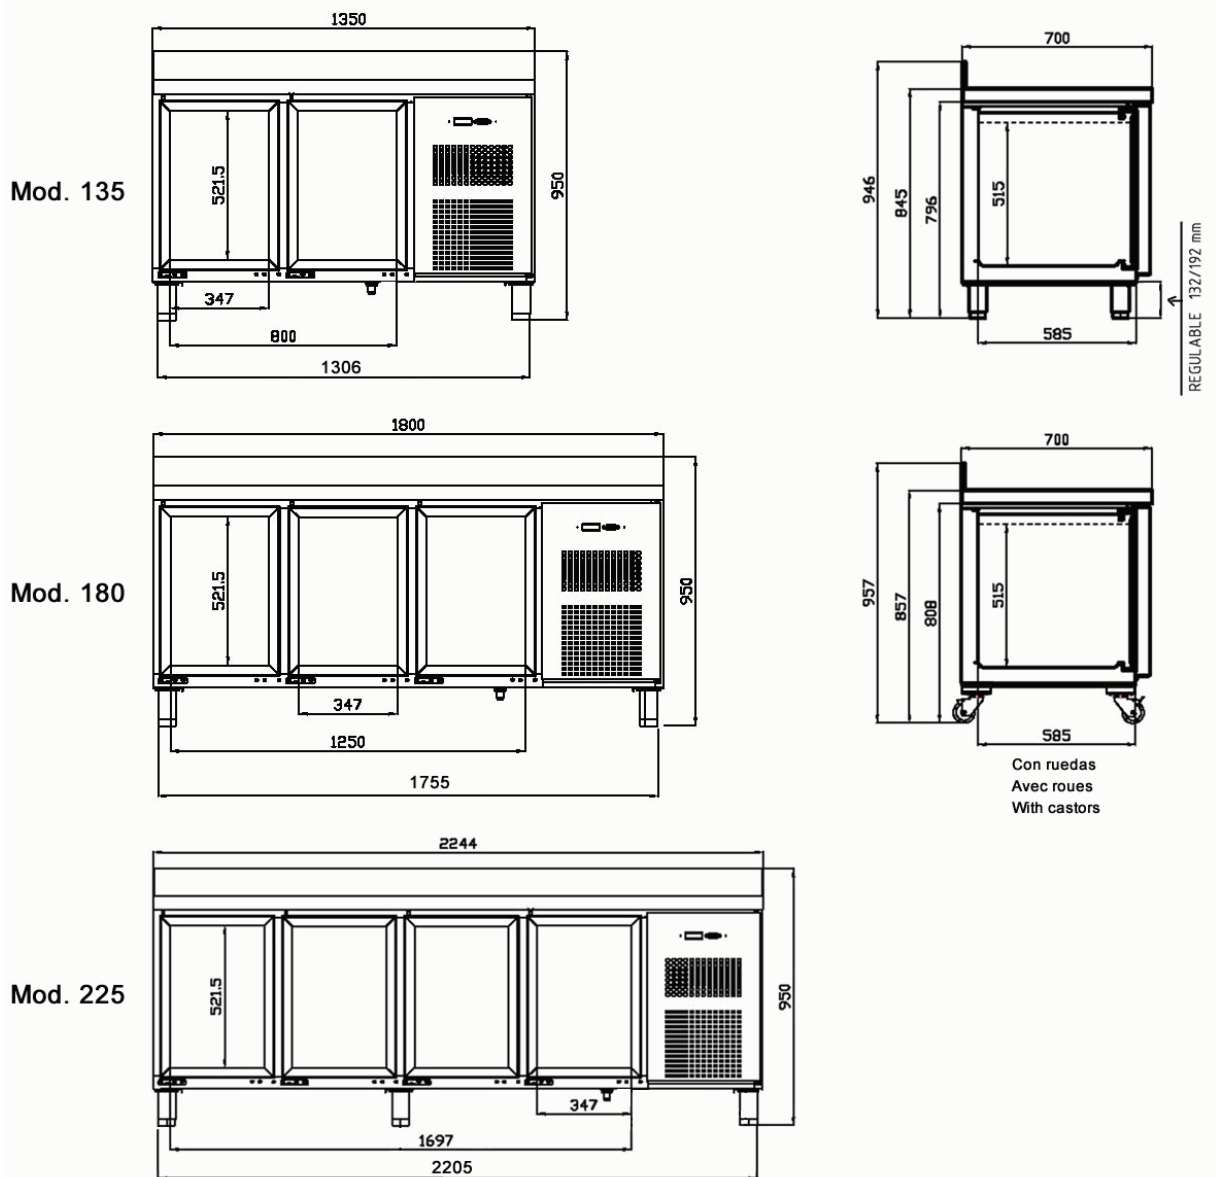



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-180-HHD 230V 1N 50Hz**

Code:

**19037791**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.800,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.910,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>169,00</b>	<b>174,00</b>
Volume	m3	<b>1,07</b>	<b>1,67</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Consumption - kW-h	365 d.	<b>767</b>
		24 h	<b>2,10</b>
	Net volume - litres	Refrig.	<b>199</b>
	Internal gross capacity	litres	<b>403</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-180-HHD

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
 40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.  
 Copper piping and aluminium flaps evaporator.  
 HACCP system that keeps running logs.  
 Digital display for electronic and digital control of temperature and defrosting.  
 The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.  
 Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.  
 Opened door delay alarm.  
 Easier loading and unloading thanks to its door self-closing and stay open features.  
 Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).  
 Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.  
 Built in drainage to get rid of waste liquids inside the unit.  
 Embedded bottom and curved panels inside for easy cleaning and maintenance.  
 Height adjustable stainless steel legs.  
 10 cm high splashback.  
 Stainless steel bottom perforated drawers can stand loads up to 40 kg.  
 Different drawer sets.  
 - 1 door D = 2 drawers unit H.  
 - 1 door D = 3 drawers unit T.  
 Working temperature: from -2 °C up to +8 °C.  
 Climatic class 4.

Doors: 4 cajones 1 puerta  
 Energy efficiency: B  
 Net capacity: 199 L  
 Gross capacity: 403 L  
 Cooling power: 310 W  
 Electric power: 170 W  
 Annual energy consumption: 767 kWh/year  
 Coolant: R-600a  
 Dimensions: 1800x700x850 mm










Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-180-HHD 230V 1N 50Hz**

Code :  
**19037791**

**SCHEMA - DIMENSIONS**

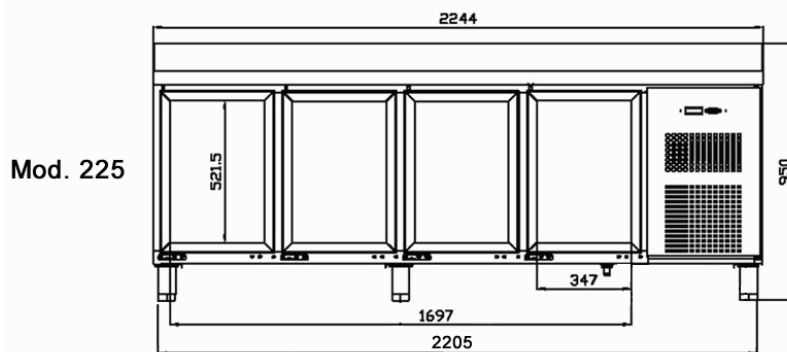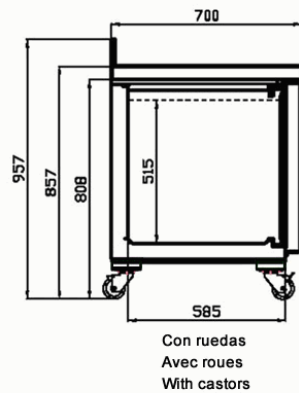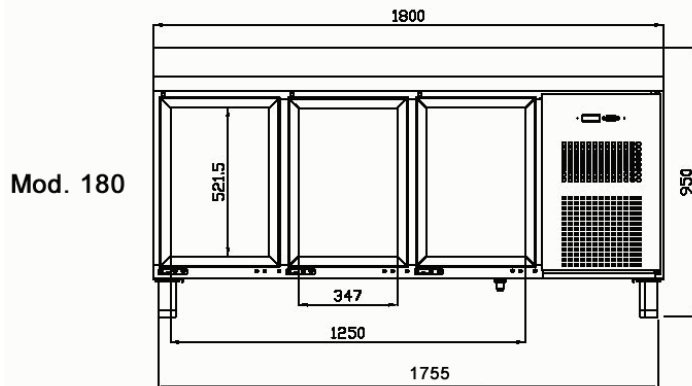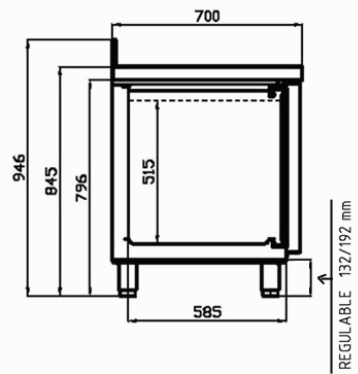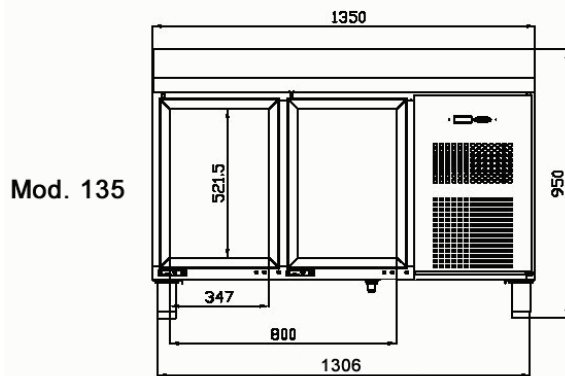



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-180-HHH 230V 1N 50Hz**

Code:

**19037792**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.800,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.910,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>183,00</b>	<b>188,00</b>
Volume	m3	<b>1,07</b>	<b>1,67</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Consumption - kW-h	365 d.	<b>767</b>
		24 h	<b>2,10</b>
	Net volume - litres	Refrig.	<b>168</b>
	Internal gross capacity	litres	<b>403</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-180-HHH

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Stainless steel bottom perforated drawers can stand loads up to 40 kg.

Different drawer sets.

- 1 door D = 2 drawers unit H.

- 1 door D = 3 drawers unit T.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 6 cajones

Energy efficiency: B

Net capacity: 168 L

Gross capacity: 403 L

Cooling power: 310 W

Electric power: 170 W

Annual energy consumption: 767 kWh/year

Coolant: R-600a

Dimensions: 1800x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-180-HHH 230V 1N 50Hz**

Code :  
**19037792**

**SCHEMA - DIMENSIONS**

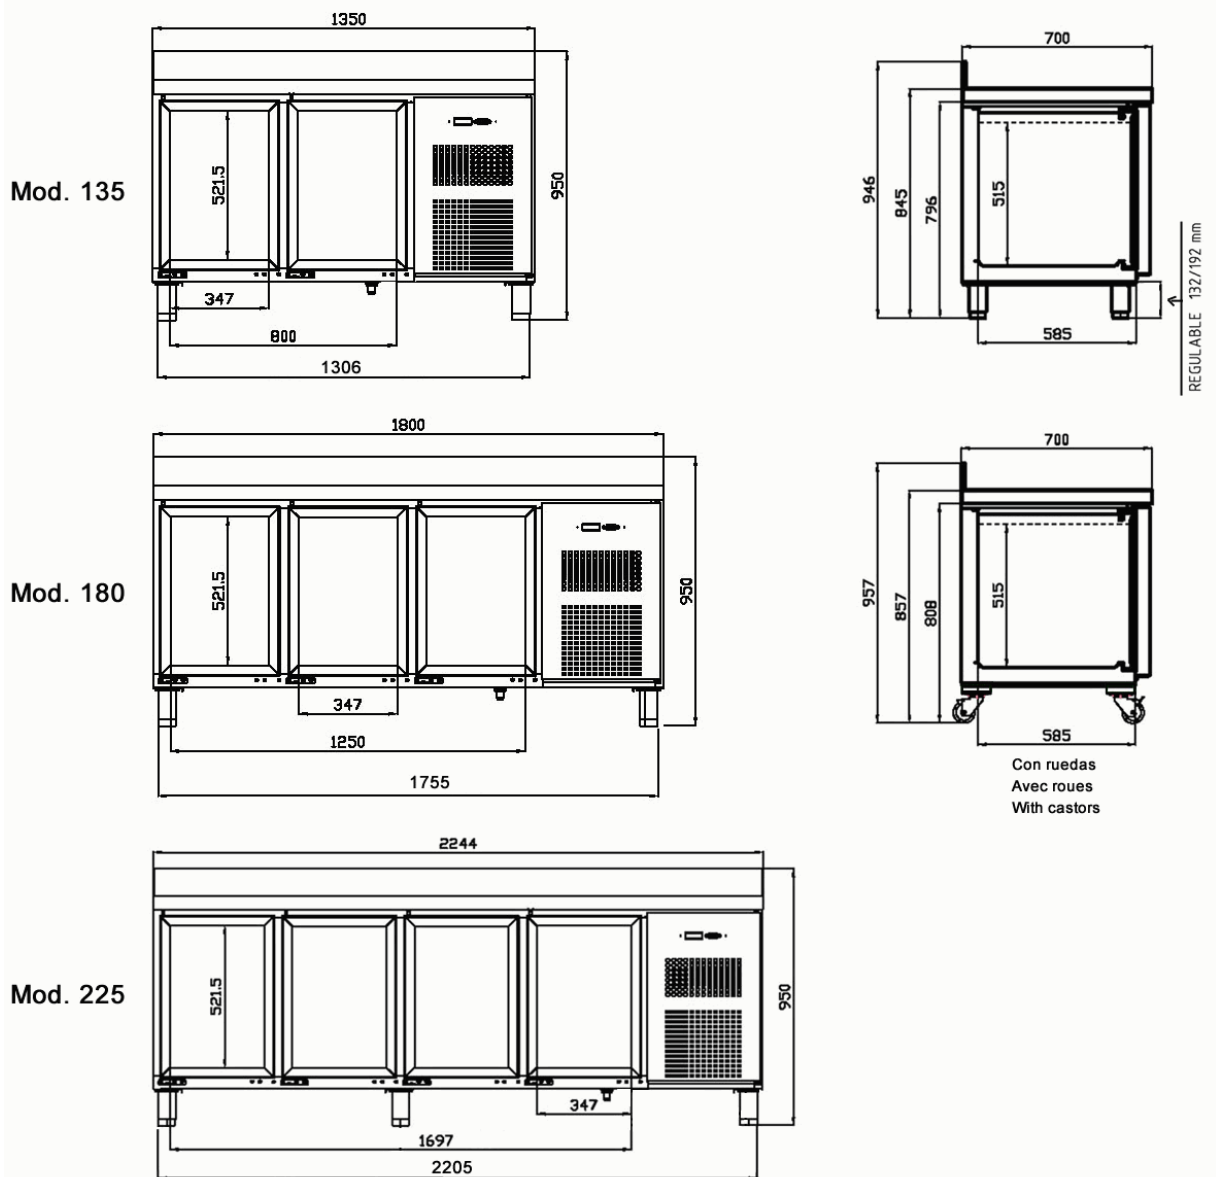





Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-225-HDDD 230V 1N 50Hz**

Code:

**19037793**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>2.250,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>2.353,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>183,00</b>	<b>188,00</b>
Volume	m3	<b>1,34</b>	<b>2,06</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,20 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,357</b>
	Consumption - kW-h	365 d.	<b>810</b>
		24 h	<b>2,22</b>
	Net volume - litres	Refrig.	<b>316</b>
	Internal gross capacity	litres	<b>549</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-225-HDDD

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Stainless steel bottom perforated drawers can stand loads up to 40 kg.

Different drawer sets.

- 1 door D = 2 drawers unit H.

- 1 door D = 3 drawers unit T.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 2 cajones 3 puertas

Energy efficiency: B

Net capacity: 316 L

Gross capacity: 549 L

Cooling power: 360 W

Electric power: 200 W

Annual energy consumption: 810 kWh/year

Coolant: R-600a

Dimensions: 2250x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-225-HDDD 230V 1N 50Hz**

Code :  
**19037793**

**SCHEMA - DIMENSIONS**

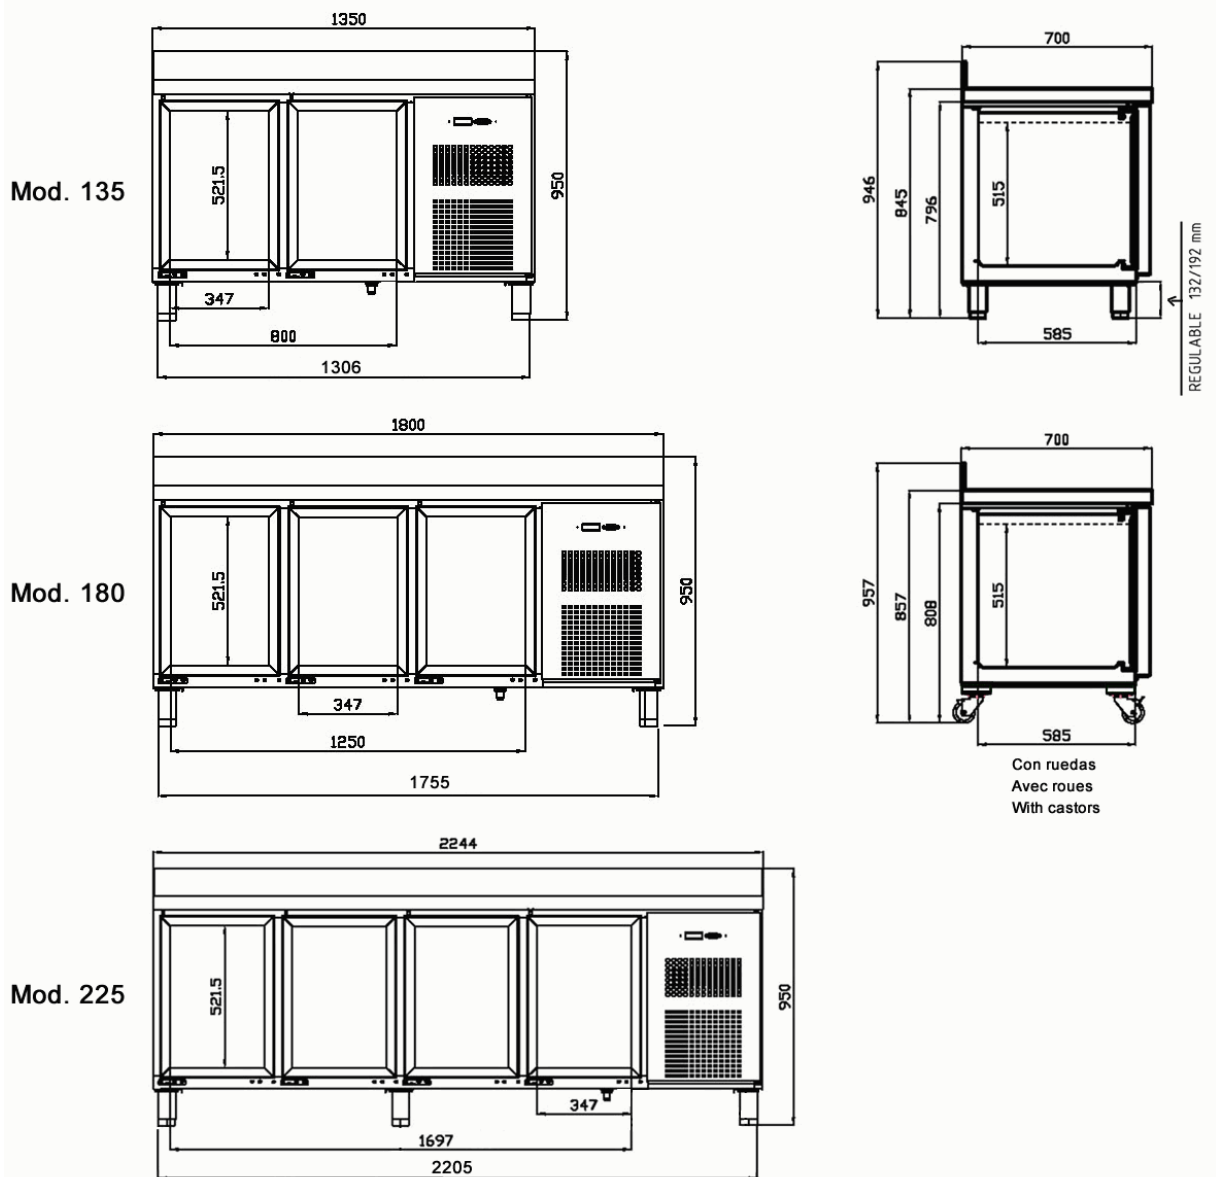



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-225-HHDD 230V 1N 50Hz**

Code:

**19037795**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>2.250,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>2.353,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>197,00</b>	<b>202,00</b>
Volume	m3	<b>1,34</b>	<b>2,06</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,20 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,357</b>
	Consumption - kW-h	365 d.	<b>810</b>
		24 h	<b>2,22</b>
	Net volume - litres	Refrig.	<b>286</b>
	Internal gross capacity	litres	<b>549</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-225-HHDD

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Stainless steel bottom perforated drawers can stand loads up to 40 kg.

Different drawer sets.

- 1 door D = 2 drawers unit H.

- 1 door D = 3 drawers unit T.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 4 cajones 2 puertas

Energy efficiency: B

Net capacity: 286 L

Gross capacity: 549 L

Cooling power: 360 W

Electric power: 200 W

Annual energy consumption: 810 kWh/year

Coolant: R-600a

Dimensions: 2250x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-225-HHDD 230V 1N 50Hz**

Code :  
**19037795**

**SCHEMA - DIMENSIONS**

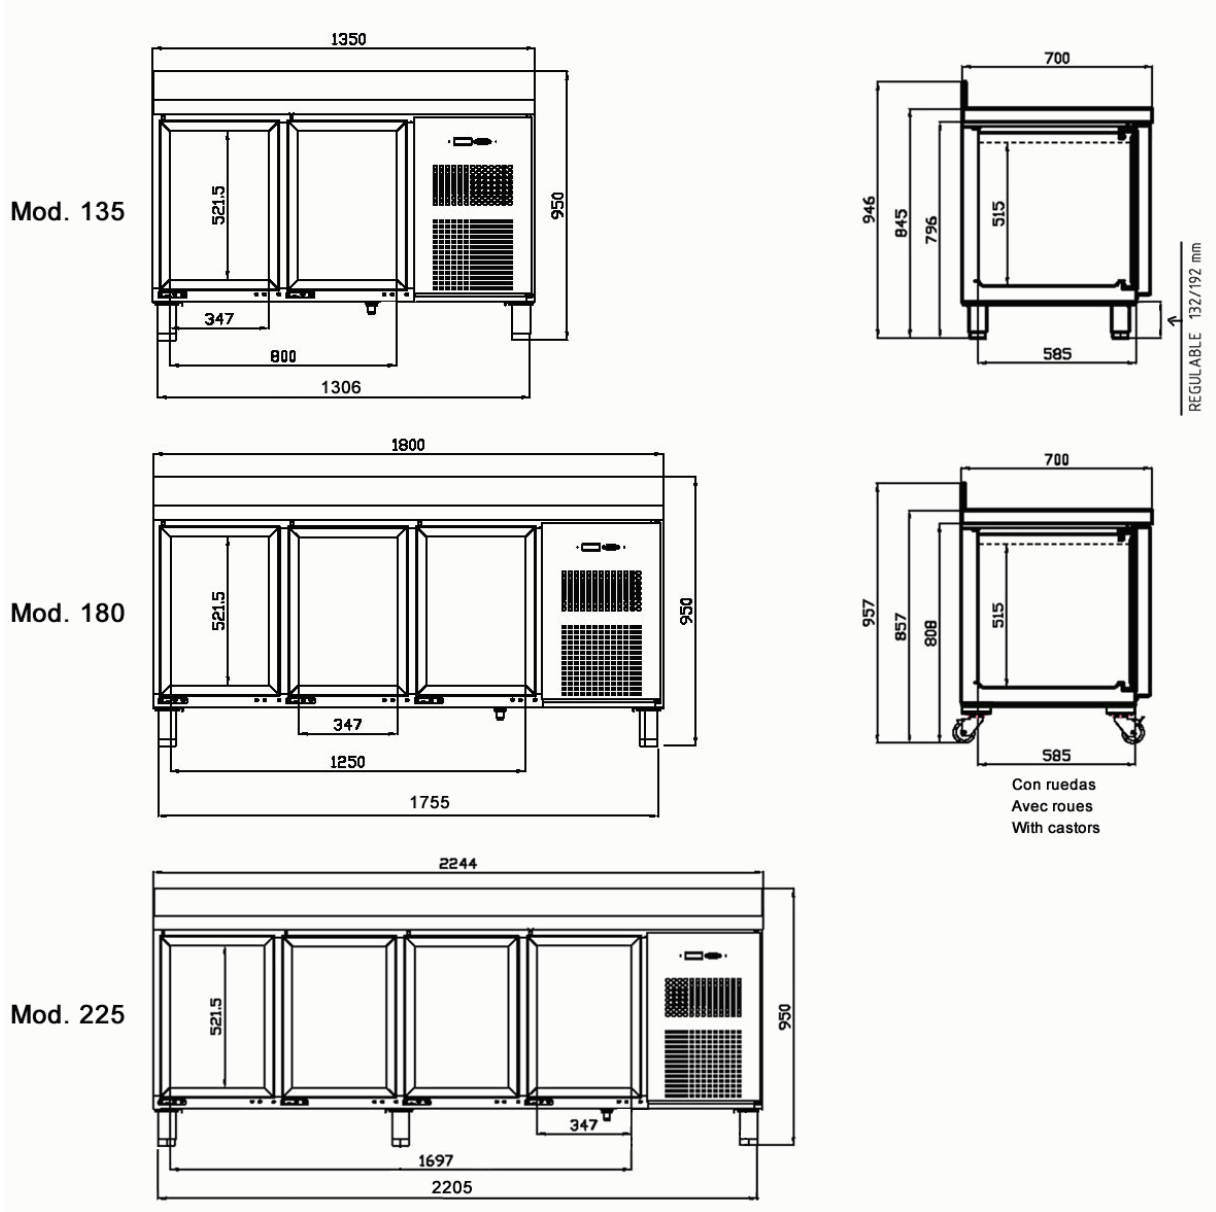



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-225-HHHD 230V 1N 50Hz**

Code:

**19037796**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>2.250,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>2.353,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>211,00</b>	<b>216,00</b>
Volume	m3	<b>1,34</b>	<b>2,06</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,20 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,357</b>
	Consumption - kW-h	365 d.	<b>810</b>
		24 h	<b>2,22</b>
	Net volume - litres	Refrig.	<b>255</b>
	Internal gross capacity	litres	<b>549</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-225-HHHD

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
 40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.  
 Copper piping and aluminium flaps evaporator.  
 HACCP system that keeps running logs.  
 Digital display for electronic and digital control of temperature and defrosting.  
 The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.  
 Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.  
 Opened door delay alarm.  
 Easier loading and unloading thanks to its door self-closing and stay open features.  
 Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).  
 Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.  
 Built in drainage to get rid of waste liquids inside the unit.  
 Embedded bottom and curved panels inside for easy cleaning and maintenance.  
 Height adjustable stainless steel legs.  
 10 cm high splashback.  
 Stainless steel bottom perforated drawers can stand loads up to 40 kg.  
 Different drawer sets.  
 - 1 door D = 2 drawers unit H.  
 - 1 door D = 3 drawers unit T.  
 Working temperature: from -2 °C up to +8 °C.  
 Climatic class 4.

Doors: 6 cajones 1 puerta  
 Energy efficiency: B  
 Net capacity: 255 L  
 Gross capacity: 549 L  
 Cooling power: 360 W  
 Electric power: 200 W  
 Annual energy consumption: 810 kWh/year  
 Coolant: R-600a  
 Dimensions: 2250x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-225-HHHD 230V 1N 50Hz**

Code :  
**19037796**

**SCHEMA - DIMENSIONS**

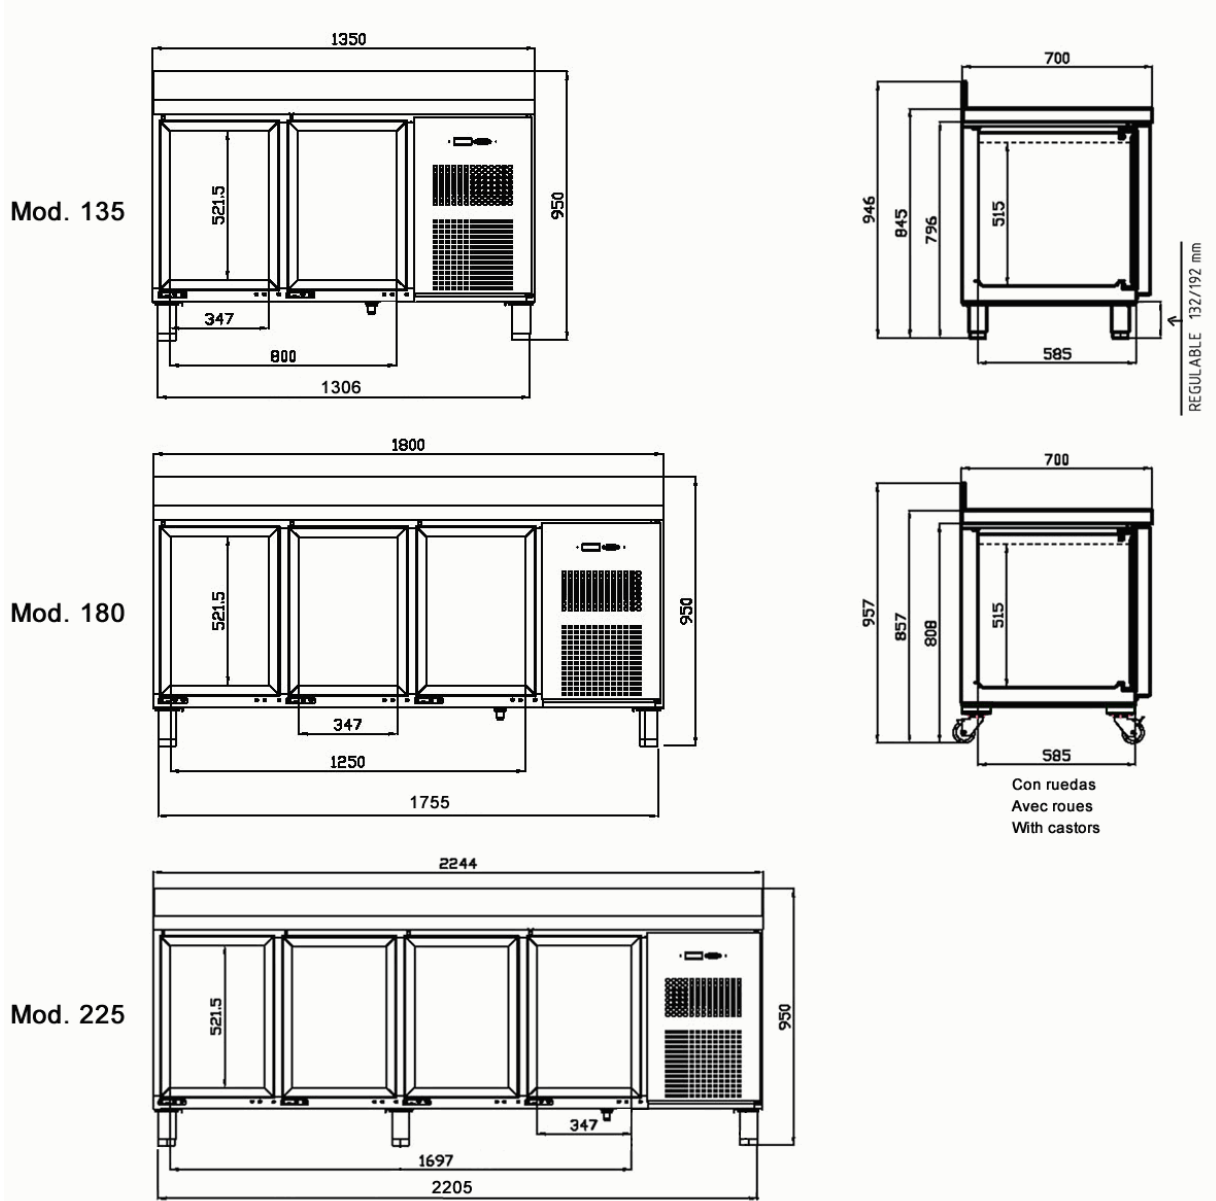



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-225-HHHH 230V 1N 50Hz**

Code:

**19037797**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>2.250,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>2.353,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>225,00</b>	<b>230,00</b>
Volume	m3	<b>1,34</b>	<b>2,06</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,20 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,357</b>
	Consumption - kW-h	365 d.	<b>810</b>
		24 h	<b>2,22</b>
	Net volume - litres	Refrig.	<b>224</b>
	Internal gross capacity	litres	<b>549</b>
	Climat class	<b>4</b>	Energy Effic. <b>B</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH DRAWERS ADVANCE, EAMFP-225-HHHH

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Stainless steel bottom perforated drawers can stand loads up to 40 kg.

Different drawer sets.

- 1 door D = 2 drawers unit H.

- 1 door D = 3 drawers unit T.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 8 cajones

Energy efficiency: B

Net capacity: 224 L

Gross capacity: 549 L

Cooling power: 360 W

Electric power: 200 W

Annual energy consumption: 810 kWh/year

Coolant: R-600a

Dimensions: 2250x700x850 mm










Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-225-HHHH 230V 1N 50Hz**

Code :  
**19037797**

**SCHEMA - DIMENSIONS**

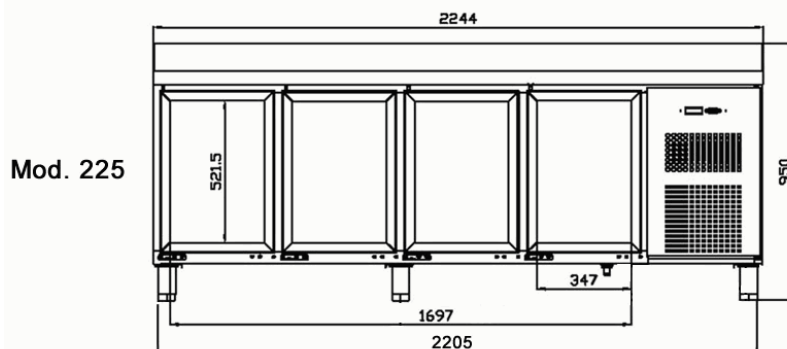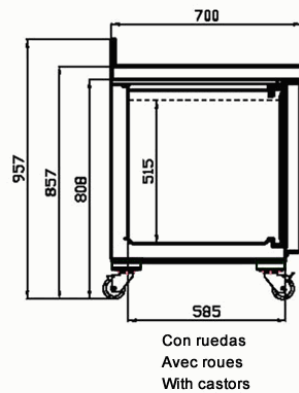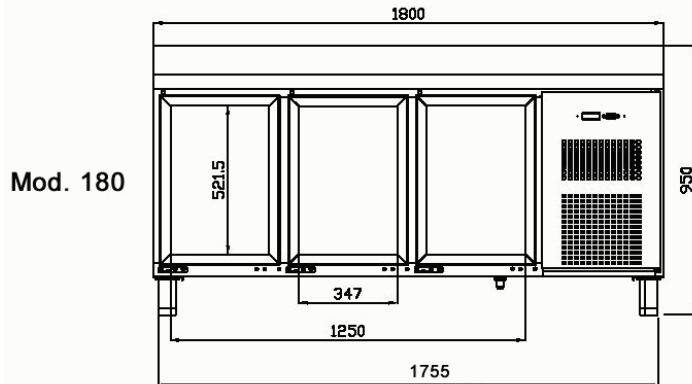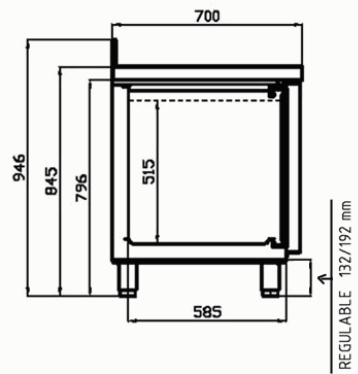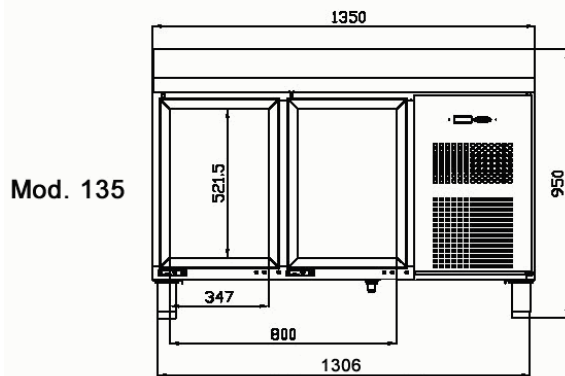





Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-135 PC 230V 1N 50Hz**

Code:

**19037798**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.350,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.455,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>113,00</b>	<b>118,00</b>
Volume	m3	<b>0,80</b>	<b>1,27</b>
<u>ELECTRICITY</u>		<b>230V</b>	<b>50Hz</b>
	Power		<b>0,18 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
	Refrigeration power		<b>R-600a</b> <b>0,309</b>
	Internal gross capacity litres		<b>258</b>
	Climat class	<b>4</b>	
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>		<b>SGS-2103-0906-1</b>	
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

REFRIGERATED COUNTER WITH GLASS DOORS ADVANCE, EAMFP-135-PC

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Double pane door and anodised aluminium frame with double vacuum chamber.

LED lighting.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 2

Gross capacity: 258 L

Cooling power: 310 W

Electric power: 170 W

Coolant: R-600a

Dimensions: 1350x700x850 mm










Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-135 PC 230V 1N 50Hz**

Code :  
**19037798**

**SCHEMA - DIMENSIONS**

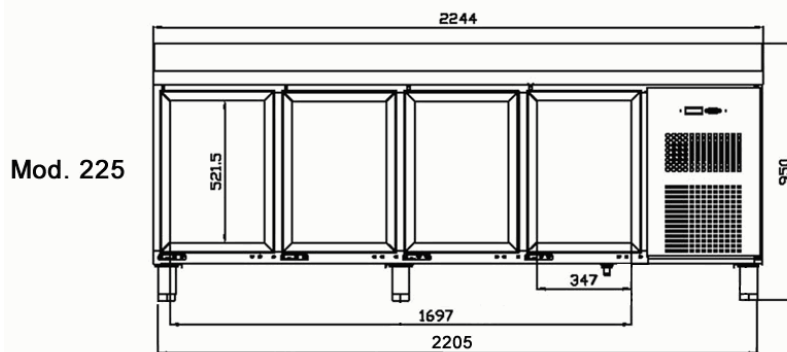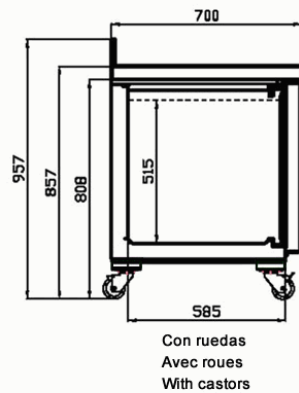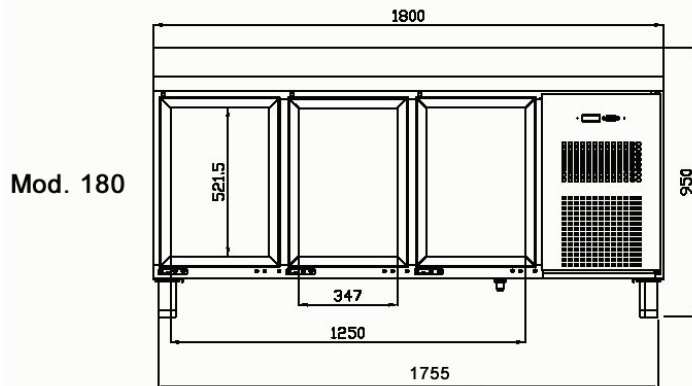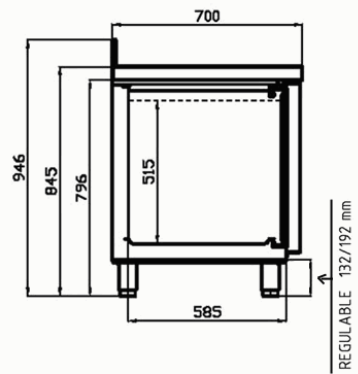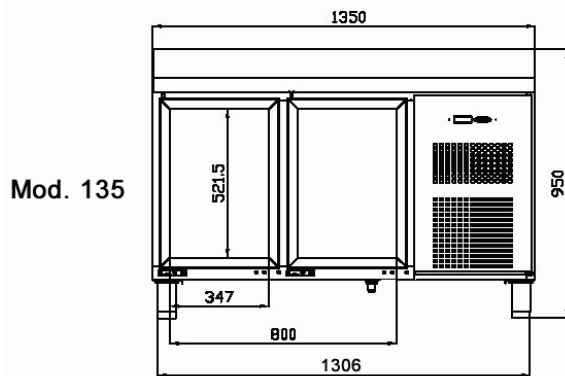



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-180 PC 230V 1N 50Hz**

Code:

**19037800**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.800,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.910,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>141,00</b>	<b>146,00</b>
Volume	m3	<b>1,07</b>	<b>1,67</b>
<u>ELECTRICITY</u>		<b>230V</b>	<b>50Hz</b>
	Power		<b>0,18 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
	Refrigeration power		<b>R-600a</b> <b>0,309</b>
	Internal gross capacity litres		<b>403</b>
	Climat class	<b>4</b>	
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>	<b>SGS-2103-0906-1</b>		
<u>INSTALLATION - CONNECTIONS</u>	<b>Ø</b>		

DESCRIPTION

REFRIGERATED COUNTER WITH GLASS DOORS ADVANCE, EAMFP-180-PC

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Double pane door and anodised aluminium frame with double vacuum chamber.

LED lighting.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 3

Gross capacity: 403 L

Cooling power: 310 W

Electric power: 170 W

Coolant: R-600a

Dimensions: 1800x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-180 PC 230V 1N 50Hz**

Code :  
**19037800**

**SCHEMA - DIMENSIONS**

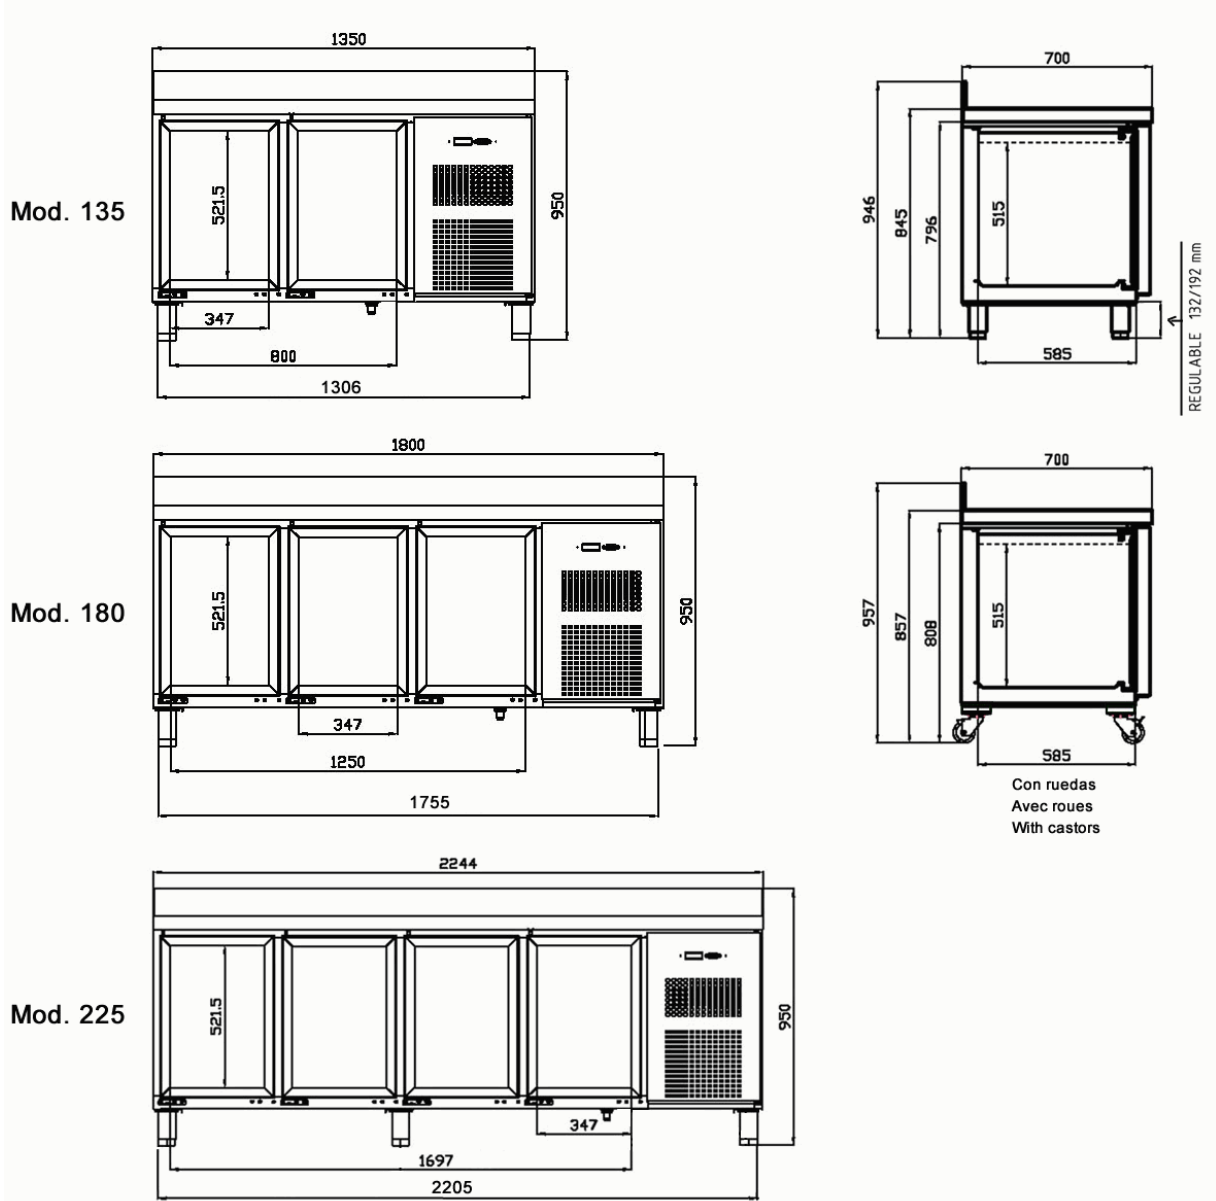



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFP-225 PC 230V 1N 50Hz**

Code:

**19037802**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>2.250,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>2.353,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>169,00</b>	<b>174,00</b>
Volume	m3	<b>1,34</b>	<b>2,06</b>
<u>ELECTRICITY</u>		<b>230V</b>	<b>50Hz</b>
	Power		<b>0,21 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
	Refrigeration power		<b>R-600a</b> <b>0,357</b>
	Internal gross capacity litres		<b>549</b>
	Climat class	<b>4</b>	
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<u>Ø</u>

DESCRIPTION

REFRIGERATED COUNTER WITH GLASS DOORS ADVANCE, EAMFP-225-PC

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
 40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.  
 Copper piping and aluminium flaps evaporator.  
 HACCP system that keeps running logs.  
 Digital display for electronic and digital control of temperature and defrosting.  
 The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.  
 Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.  
 Opened door delay alarm.  
 Easier loading and unloading thanks to its door self-closing and stay open features.  
 Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).  
 Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.  
 Built in drainage to get rid of waste liquids inside the unit.  
 Embedded bottom and curved panels inside for easy cleaning and maintenance.  
 Height adjustable stainless steel legs.  
 10 cm high splashback.  
 Double pane door and anodised aluminium frame with double vacuum chamber.  
 LED lighting.  
 Working temperature: from -2 °C up to +8 °C.  
 Climatic class 4.

Doors: 4  
 Gross capacity: 549 L  
 Cooling power: 360 W  
 Electric power: 240 W  
 Coolant: R-600a  
 Dimensions: 2250x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFP-225 PC 230V 1N 50Hz**

Code :  
**19037802**

**SCHEMA - DIMENSIONS**

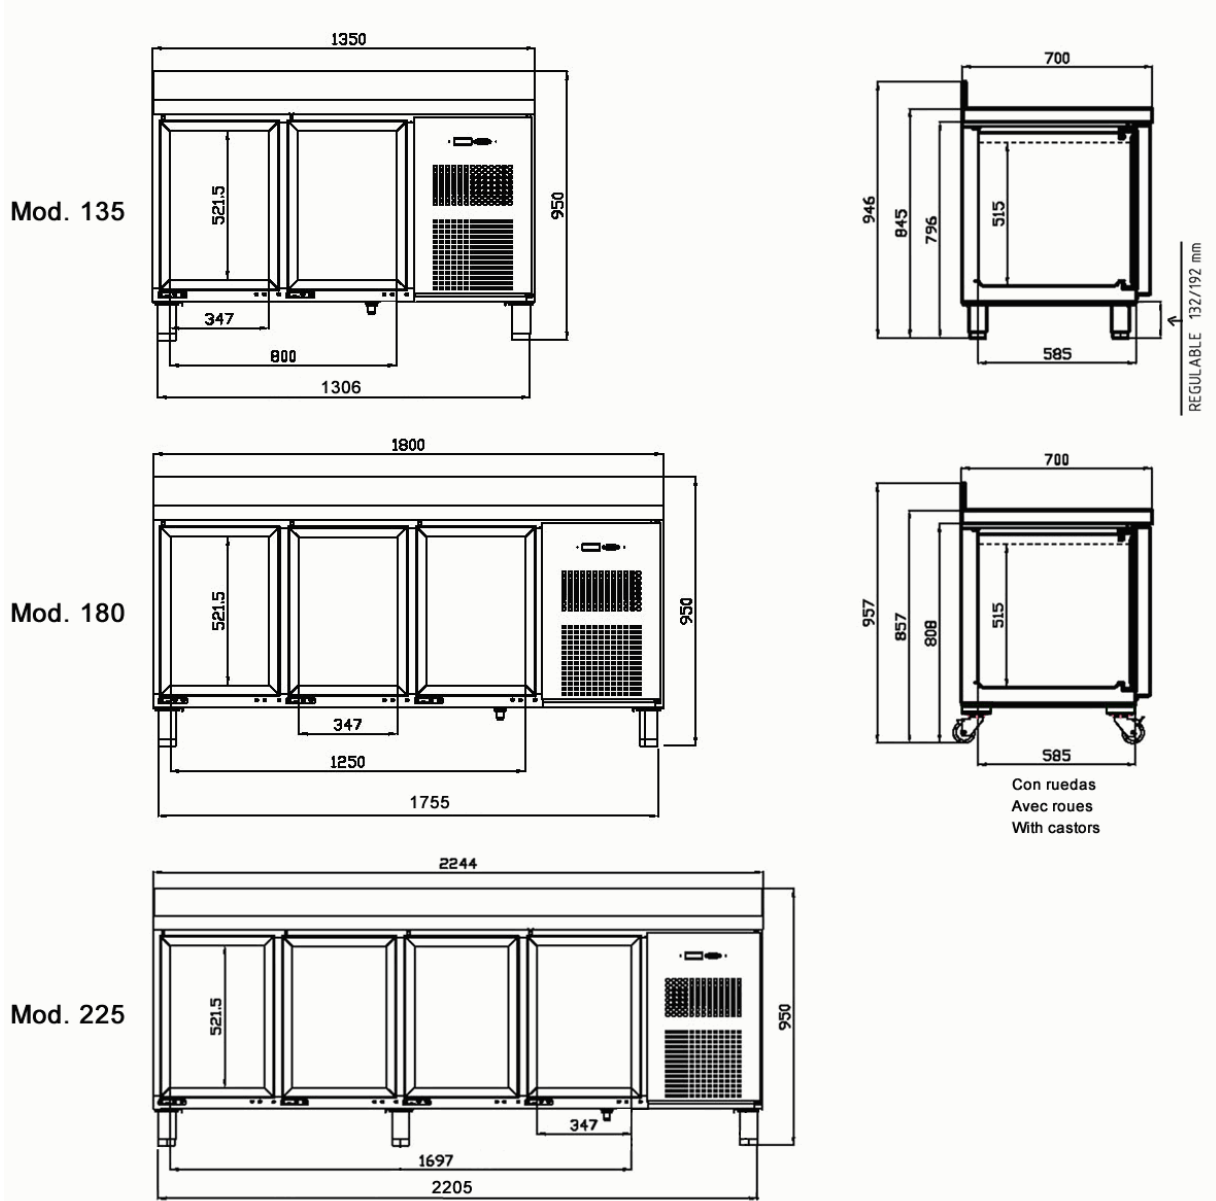



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMCP-135 230V 1N 50Hz**

Code:

**19037803**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.350,00</b>	<b>825,00</b>
Depth	mm	<b>768,00</b>	<b>1.455,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>113,00</b>	<b>118,00</b>
Volume	m3	<b>0,88</b>	<b>1,27</b>
<u>ELECTRICITY</u>		<b>230V</b>	<b>50Hz</b>
	Power		<b>0,17 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,309</b>
	Internal gross capacity litres		<b>258</b>
	Climat class	<b>4</b>	
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<u>Ø</u>

DESCRIPTION

REFRIGERATED CENTRAL COUNTER ADVANCE, EAMCP-135

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 2+2

Gross capacity: 258 L

Cooling power: 310 W

Electric power: 170 W

Coolant: R-600a

Dimensions: 1350x768x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMCP-135 230V 1N 50Hz**

Code :  
**19037803**

**SCHEMA - DIMENSIONS**

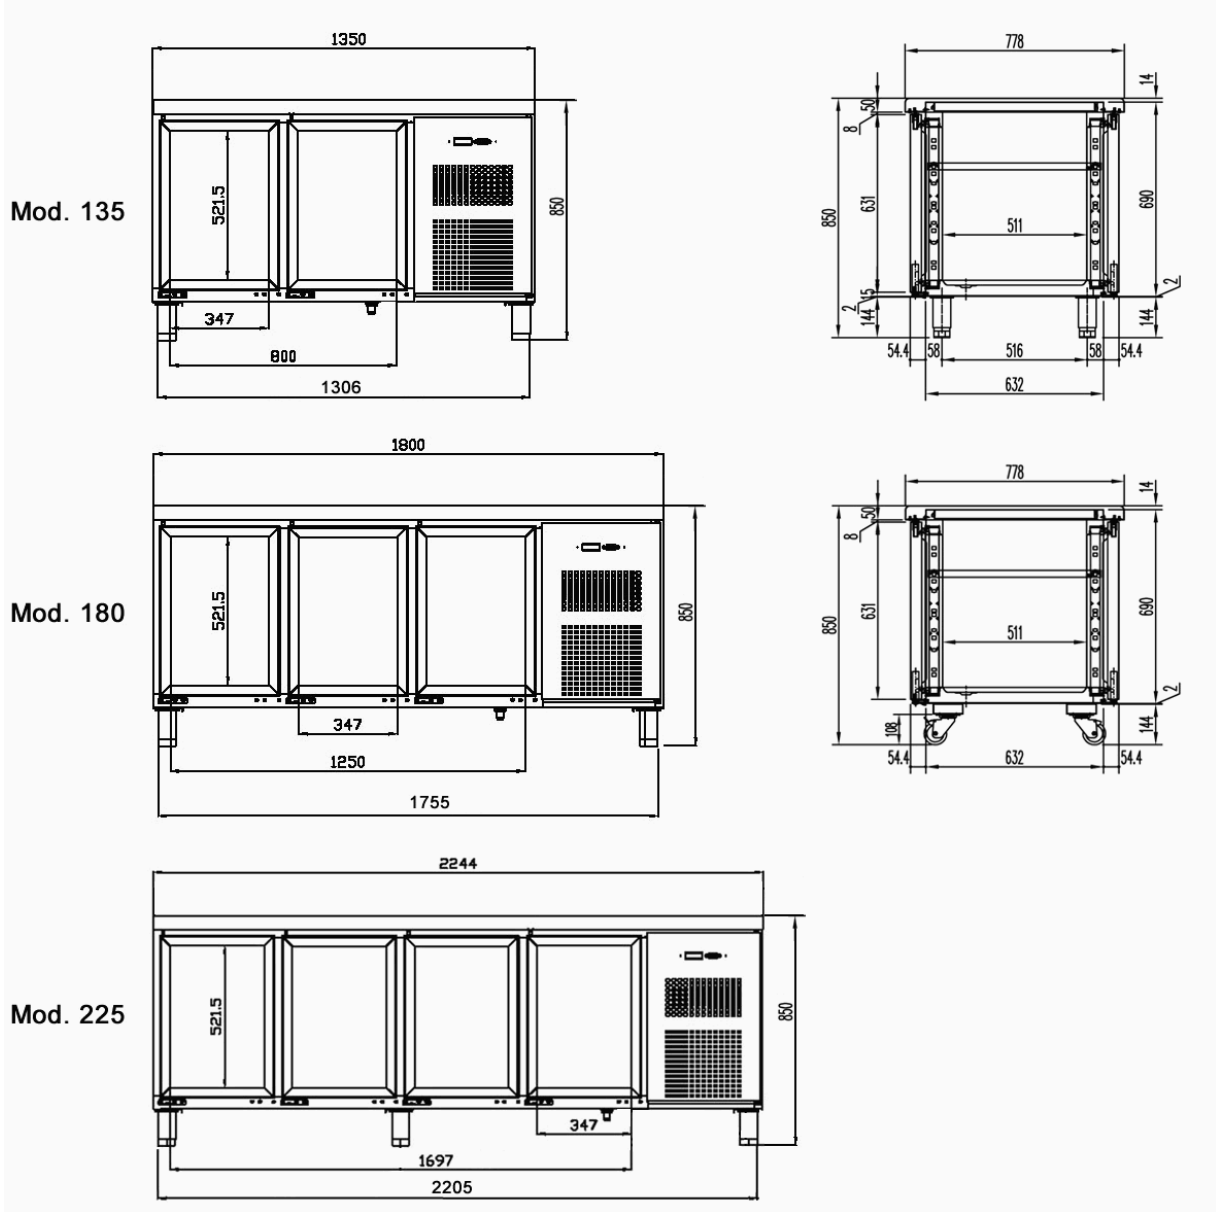





Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMCP-180 230V 1N 50Hz**

Code:

**19037804**

<u>DIMENSIONS AND WEIGHTS</u>	<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.800,00</b>
Depth	mm	<b>768,00</b>
Height	mm	<b>850,00</b>
Weight	kg	<b>141,00</b>
Volume	m3	<b>1,18</b>
<u>ELECTRICITY</u>	<b>230V</b>	<b>50Hz</b>
	Power	<b>0,17 kW</b>
Connections	230 V. 1+N+T	
	230 V. III+T	
	400 V. III+N+T	
<u>GAS</u>	Not necessary	
<u>WATER</u>	Not necessary	
<u>STEAM</u>	Not necessary	
<u>AIR</u>	Not necessary	
		<b>R-600a</b>
	Refrigeration power	<b>0,309</b>
	Internal gross capacity litres	<b>403</b>
	Climat class	<b>4</b>
<u>SOUND LEVEL</u>		<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>	<b>SGS-2103-0906-1</b>	
<u>INSTALLATION - CONNECTIONS</u>		<b>Ø</b>

DESCRIPTION

REFRIGERATED CENTRAL COUNTER ADVANCE, EAMCP-180

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 3+3

Gross capacity: 403 L

Cooling power: 310 W

Electric power: 170 W

Coolant: R-600a

Dimensions: 1800x768x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMCP-180 230V 1N 50Hz**

Code :  
**19037804**

**SCHEMA - DIMENSIONS**

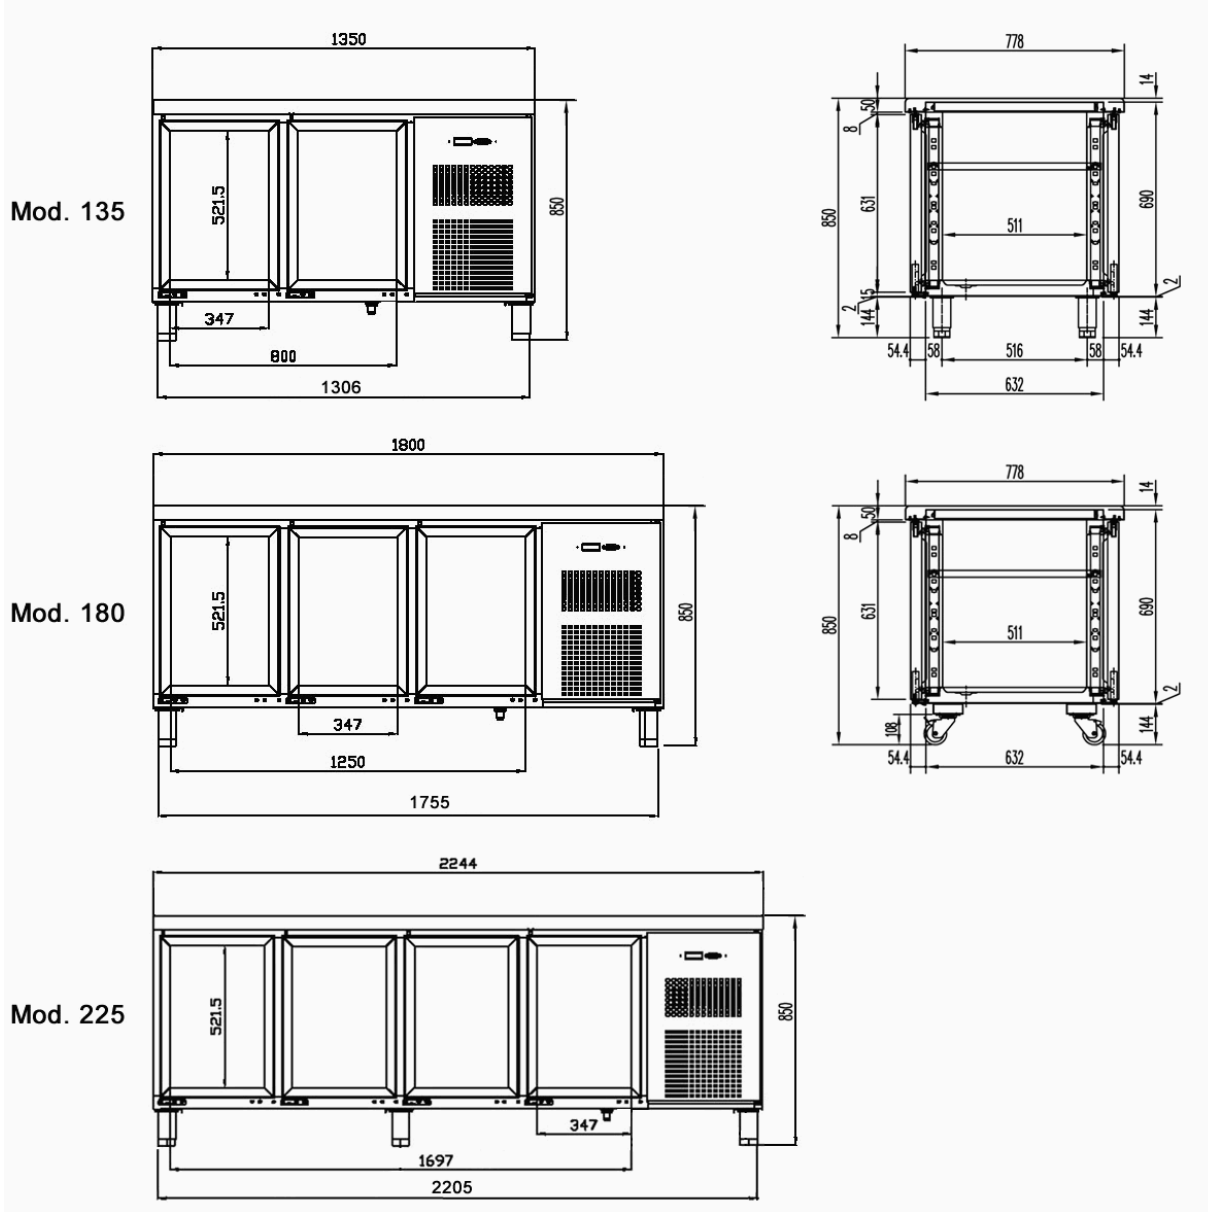



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMCP-225 230V 1N 50Hz**

Code:

**19037805**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>2.250,00</b>	<b>825,00</b>
Depth	mm	<b>768,00</b>	<b>2.353,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>169,00</b>	<b>174,00</b>
Volume	m3	<b>1,47</b>	<b>2,06</b>
<u>ELECTRICITY</u>		<b>230V</b>	<b>50Hz</b>
	Power		<b>0,20 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-600a</b>
	Refrigeration power		<b>0,357</b>
	Internal gross capacity litres		<b>546</b>
	Climat class	<b>4</b>	
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>INSTALLATION - CONNECTIONS</u>			<u>Ø</u>

DESCRIPTION

REFRIGERATED CENTRAL COUNTER ADVANCE, EAMCP-225

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

Working temperature: from -2 °C up to +8 °C.

Climatic class 4.

Doors: 4+4

Gross capacity: 546 L


Cooling power: 360 W

Electric power: 200 W

Coolant: R-600a

Dimensions: 2250x768x850 mm



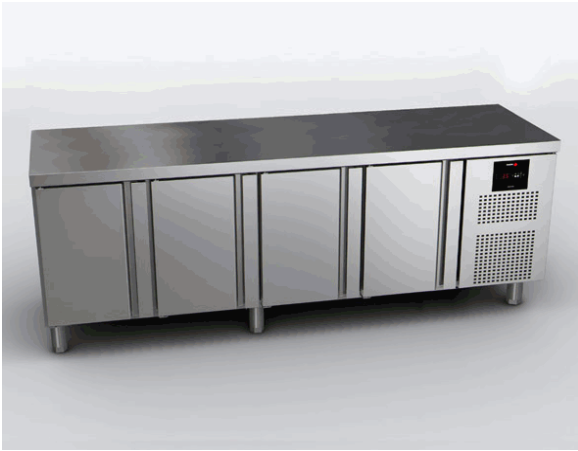


Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMCP-225 230V 1N 50Hz**

Code :  
**19037805**

**SCHEMA - DIMENSIONS**

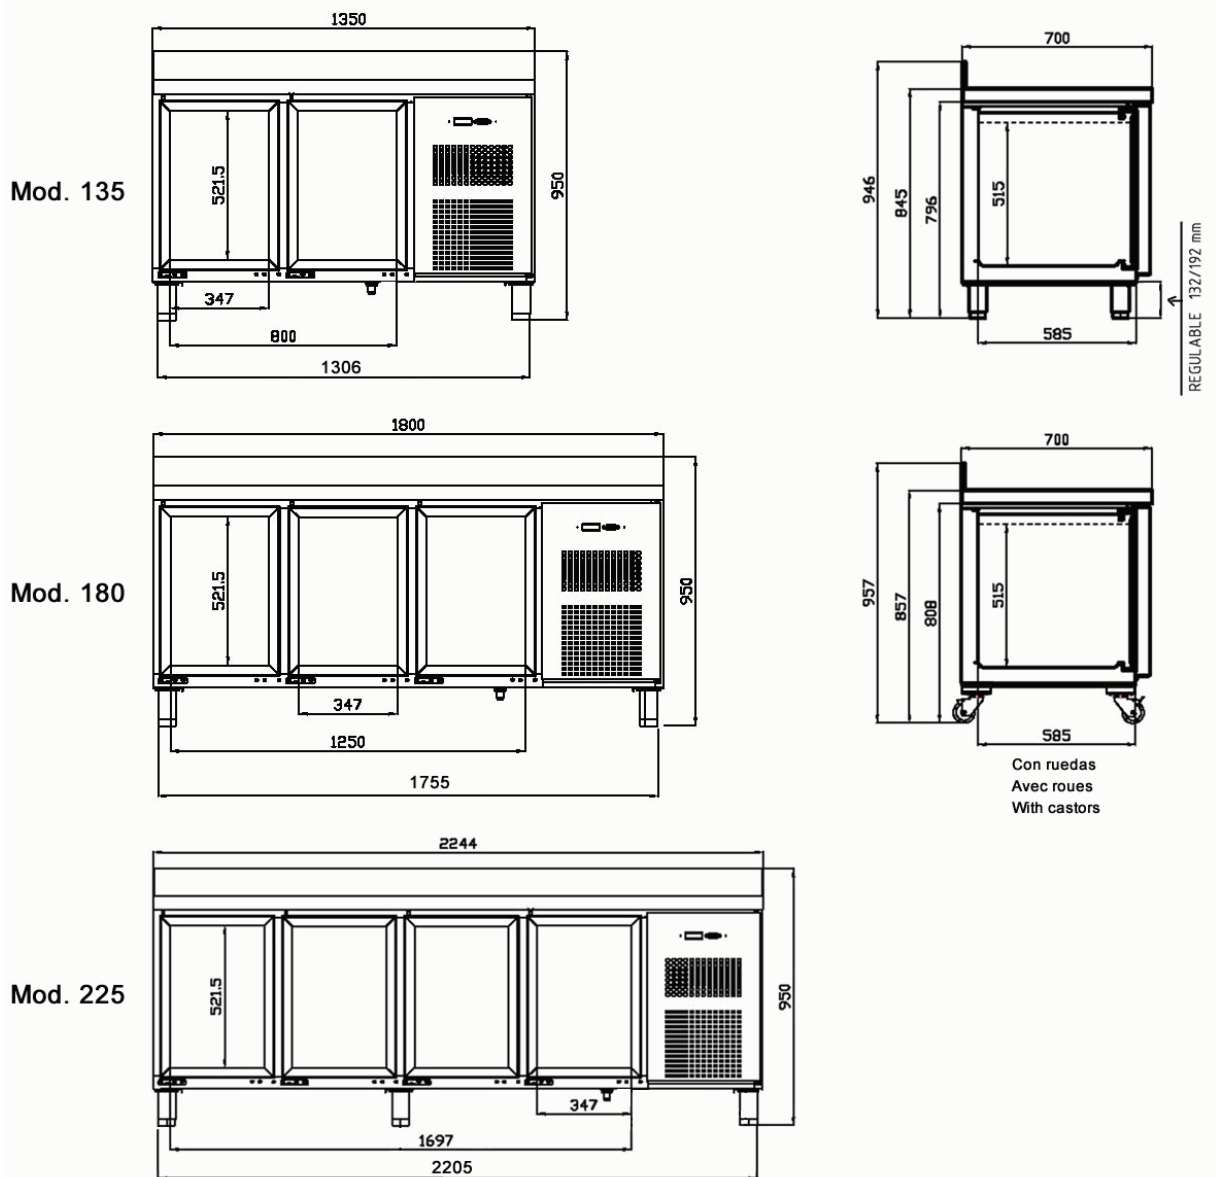



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFN-135 230V 1N 50Hz**

Code:

**19037806**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.350,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.455,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>123,00</b>	<b>128,00</b>
Volume	m3	<b>0,80</b>	<b>1,27</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,62 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-290</b>
	Refrigeration power		<b>0,289</b>
	Consumption - kW-h	365 d.	<b>2.044</b>
		24 h	<b>5,60</b>
	Net volume - litres		
		Congel.	<b>173</b>
	Internal gross capacity	litres	<b>258</b>
	Climat class	<b>4</b>	Energy Effic. <b>D</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>		<b>SGS-2103-0906-1</b>	
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

FREEZER COUNTER ADVANCE, EAMFN-135

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Working temperature: from -18 °C up to -22 °C.

Climatic class 4.

Doors: 2

Energy efficiency: D

Net capacity: 173 L

Gross capacity: 258 L

Cooling power: 290 W

Electric power: 340 W

Annual energy consumption: 2044 kWh/year

Coolant: R-290

Dimensions: 1350x700x850 mm






Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFN-135 230V 1N 50Hz**

Code :  
**19037806**

**SCHEMA - DIMENSIONS**

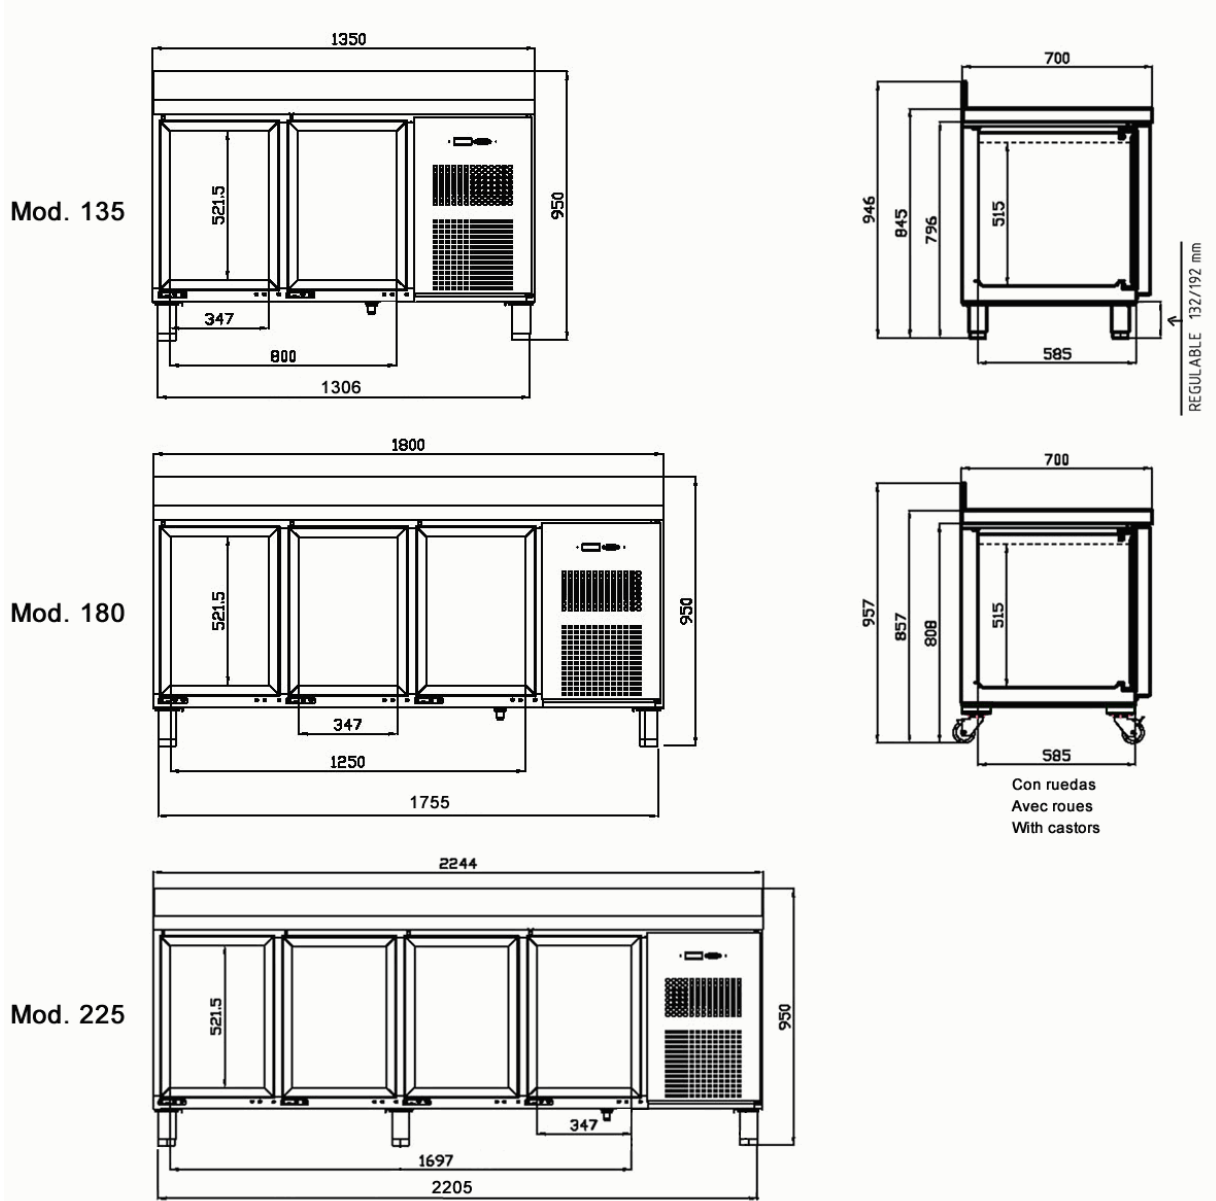



Catalogue :

**GLOBE COUNTERS**

Chapter :

**GLOBE ADVANCE COUNTERS**

Article :

**EAMFN-180 230V 1N 50Hz**

Code:

**19037809**

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	<b>1.800,00</b>	<b>825,00</b>
Depth	mm	<b>700,00</b>	<b>1.910,00</b>
Height	mm	<b>850,00</b>	<b>1.060,00</b>
Weight	kg	<b>148,00</b>	<b>156,00</b>
Volume	m3	<b>1,07</b>	<b>1,67</b>
<u>ELECTRICITY</u>		<b>50Hz</b>	
	<b>230V</b>		
	Power		<b>0,62 kW</b>
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Not necessary		
<u>WATER</u>	Not necessary		
<u>STEAM</u>	Not necessary		
<u>AIR</u>	Not necessary		
			<b>R-290</b>
	Refrigeration power		<b>0,289</b>
	Consumption - kW-h	365 d.	<b>2.654</b>
		24 h	<b>7,27</b>
	Net volume - litres		
		Congel.	<b>261</b>
	Internal gross capacity	litres	<b>403</b>
	Climat class	<b>4</b>	Energy Effic. <b>D</b>
<u>SOUND LEVEL</u>			<b>&lt; 65,00 db</b>
<u>CERTIFICATES</u>		<b>SGS-2103-0906-1</b>	
<u>INSTALLATION - CONNECTIONS</u>			<b>Ø</b>

DESCRIPTION

FREEZER COUNTER ADVANCE, EAMFN-180

SPECIFICATIONS

High quality austenitic stainless steel inside and outside (except for galvanized back panel).  
40 kg/m3 injected polyurethane isolation. 60 mm thick side walls, while the ceiling is 40 mm thick with a 50 mm worktop on it to make a total 90 mm thickness.

Copper piping and aluminium flaps evaporator.

HACCP system that keeps running logs.

Digital display for electronic and digital control of temperature and defrosting.

The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.

Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.

Opened door delay alarm.

Easier loading and unloading thanks to its door self-closing and stay open features.

Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).

Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.

Built in drainage to get rid of waste liquids inside the unit.

Embedded bottom and curved panels inside for easy cleaning and maintenance.

Height adjustable stainless steel legs.

10 cm high splashback.

Working temperature: from -18 °C up to -22 °C.

Climatic class 4.

Doors: 3

Energy efficiency: D

Net capacity: 261 L

Gross capacity: 403 L

Cooling power: 290 W

Electric power: 340 W

Annual energy consumption: 2654 kWh/year

Coolant: R-290

Dimensions: 1800x700x850 mm





Catalogue :  
**GLOBE COUNTERS**

Chapter :  
**GLOBE ADVANCE COUNTERS**

Article :  
**EAMFN-180 230V 1N 50Hz**

Code :  
**19037809**

**SCHEMA - DIMENSIONS**

