

SPN 255

SIMAG

200 kg Modular Ice Machine

Complete range: SPN 125 – SPN 255 – SPN 405 – SPN 605 – SPN 1205

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production

Matching bins

Machine	Bins		kg
SPN 255	✓	R100	129
	✓	R130	168
		CBT30EFSD R150	181
		CBT30EFSD R190	243
		CBT42EFSD R250	252
	✓	RC200	210
	✓	RC300	391

✓ : Direct coupling
 CBTxxxxxxxx : accessory needed




Type of ice

Flake ice



Residual water content 25%



Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Machine dimensions

Net size WxDxH 564 x 536 x 531 mm

Net weight 49 kg

Shipping size WxDxH 0 x 0 x 0 mm

Shipping weight 56 kg

Technology and Certifications



MILANO OFFICE
 Sales Dept.
 Tel. +39 02 93900215
 e-mail: sales@simag.it
 Service Dept.
 Tel. +39 02 93960357
 e-mail: service@simag.it

SIMAG FAR EAST
 Singapore Office
 Tel. ++65 6738 5393
 e-mail: scotsman@scotsman.com.sg


www.simag.it

SPN 255



200 kg Modular Ice Machine

Complete range: SPN 125 - SPN 255 - SPN 405 - SPN 605 - SPN 1205

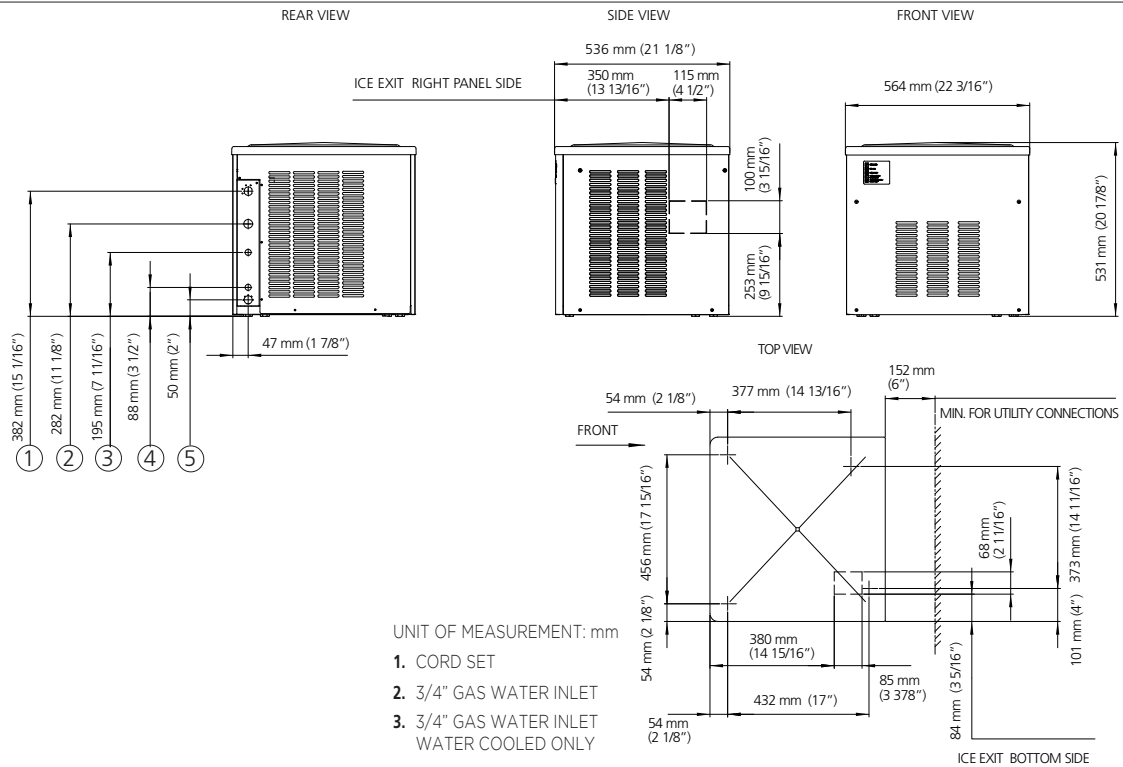

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg	Power input Watt (*)	Refrigerant		Fuse A	Consumptions		
		10°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h (**)
SPN 255 A	230/50/1	200	700	R134a	0.48	10	n.a.	n.a.	6.5
SPN 255 W	230/50/1	205	650	R134a	0.26	10	n.a.	n.a.	108.0
SPN 255 A	220/60/1	200	n.a.	R134a	n.a.	10	n.a.	n.a.	n.a.
SPN 255 W	220/60/1	205	n.a.	R134a	n.a.	10	n.a.	n.a.	n.a.

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water