



Catalogue :

SERIE 900 KORE

Chapter :

RANGES 900 KORE

Article :

C-G960 LPG

Code:

19030925

<u>DIMENSIONS AND WEIGHTS</u>		<u>Net dimensions</u>	<u>Packed</u>
Length	mm	1.200,00	1.240,00
Depth	mm	930,00	1.022,00
Height	mm	290,00	535,00
Weight	kg	123,00	148,00
Volume	m3	0,33	0,68

<u>ELECTRICITY</u>		<u>N/A</u>	<u>N/A</u>
Not necessary			
Connections	230 V. 1+N+T		
	230 V. III+T		
	400 V. III+N+T		
<u>GAS</u>	Power		41,95 kW
	Gas type	LPG	
	Consumption		3,22 kg/h
	Pressure	LPG G30/G31 28-30/37 mbar	

WATER Not necessary

STEAM Not necessary

AIR Not necessary

DESCRIPTION

2-BURNER GAS BOILING TOP, C-G960
 Top burners are adequate for a variety of containers such as frying pans, saucepans, pots, etc.
 Depending on the container, you may stew, boil, make soup, legumes, scrambled eggs, fried dishes...
 Using the optional plate (easy to place on any of the grids) you may grill meat, fish, sea food or vegetables at any moment.
 2 mm thick AISI-304 stainless steel embedded top. Each half module (two burners) is fitted with an integrated 1 litre liquid-collecting container.
 Laser cut and automatic welding for a perfect side to side adjustment of modules with square angle finish.
 Machine with six burners of different power for a variety of containers and to provide different ways to cook different types of food: (3 x 5.25) + (2 x 8.0) + 10.2 kW
 Double crown nickel-plated cast iron burners and diffusers to ensure an even distribution of heat and flame on pans' bottom, even on those of large dimensions.
 This prevents the concentration of heat at one single spot and optimizes power transfer to the product.
 Burner and diffuser parts easy to remove and dismantle for cleaning. Unequivocal position of the burner assembly and placement.
 397 x 350 mm grid for large size pans and frying pans.
 75 mm distance between central spokes to support small dimension pans (8 + 9 cm). This provides a safe stand for small containers.
 The grids are made of RAAF enamelled cast iron (resistant to alkaline, acid products ant to fire and high temperatures). Easy to remove and washable.
 Low consumption pilots and thermocouples inside the burner's body for a more efficient protection.
 Water-tight and protecting-support controls.
 High temperature protector for the chimney made of enamelled cast iron. The protector is levelled with burners to provide a larger working surface with improved manoeuvrability for large cooking containers.
 Pre-installation for water column on the back of the equipment.
 Front access to components.
 According to European standards for components and panels temperature, efficiencies and combustion, and sanitary regulations (EN-60335 and EN-203)
 Maximum power: 41.95 kW - Gas
 Dimensions: 1,200 x 930 x 290 mm.

SOUND LEVEL < 65,00 db

CERTIFICATES 1312CS6219

INSTALLATION - CONNECTIONS Ø
 ► GAS "R,3/4""G"





Catalogue :
SERIE 900 KORE



Chapter :
RANGES 900 KORE

Article :
C-G960 LPG


Code :
19030925

SCHEMA - DIMENSIONS


C-G920 & C-G920 H

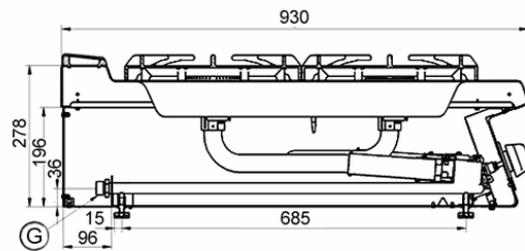


C-G940 & C-G940 H

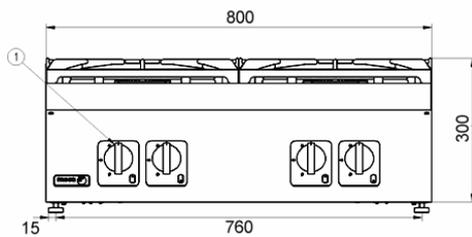

C-G910

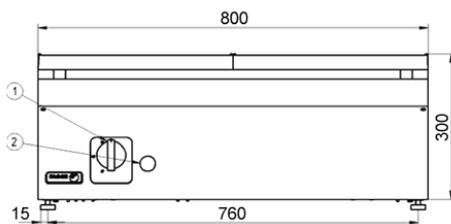

C-G960 & C-G960 H

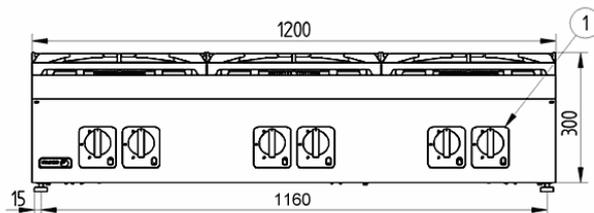

- G. Entrada de Gas
- 1. Válvula de gas
- 2. Pulsador tren de chispas
- 3. Mando H

- G. Gas Inlet
- 1. Gas valve
- 2. Piezoelectric ignitor
- 3. H control