

SDE18



18 kg Self-contained Ice Cuber

Other models in this range: SDE24 - SDE30 - SDE 34 - SDE40 - SDE50 - SDE64 - SDE84 - SDE100 - SDE170 - SDE220

Technical Features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R134a

24 Hour Ice Production - 10°C/10° C

Air Cooled 18 kg N° of cubes 860

Water Cooled 15 kg N° of cubes 710

Bin Capacity

kg 4

Warranty

3 years warranty on components

Voltage



230/50/1 standard version

220-240/60/1 version available on demand

Technology and Certifications



Certified ISO 9001

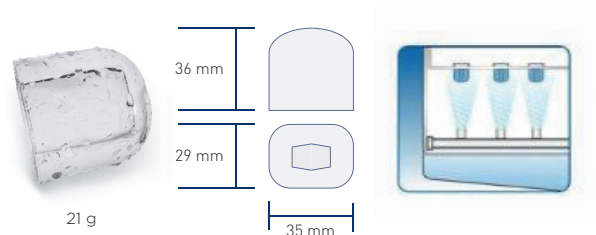

MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SDE18

18 kg Self-contained Ice Cuber



Other models in this range: SDE24 - SDE30 - SDE 34 - SDE40 - SDE50 - SDE64 - SDE84 - SDE100 - SDE170 - SDE220

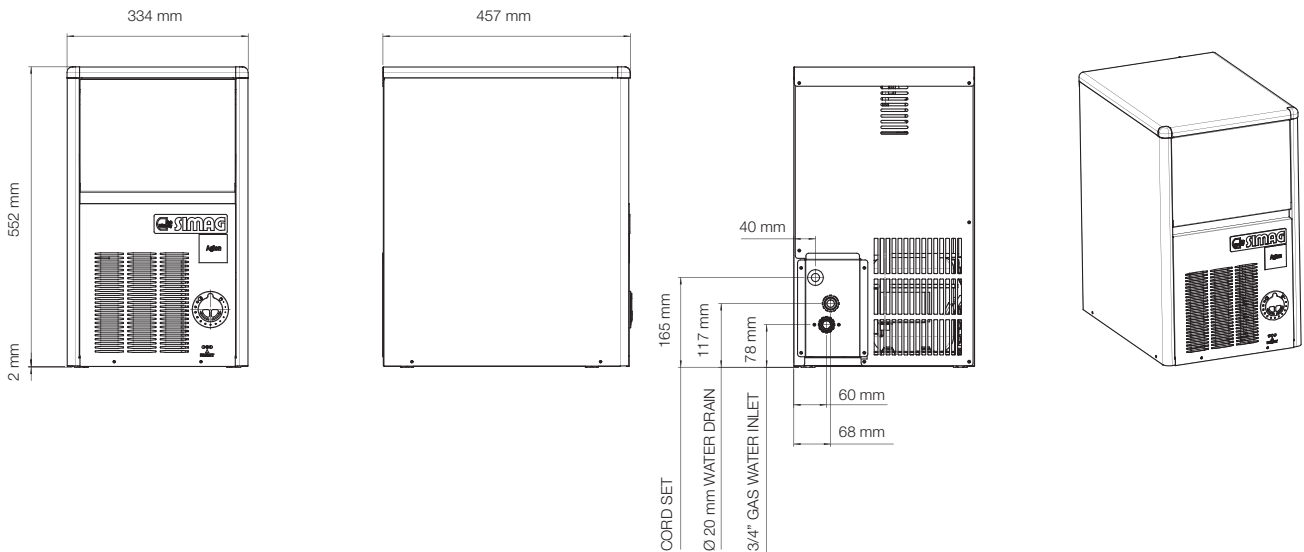

* DRAINAGE PER GRAVITY



EVAPORATOR
THERMOSTAT
REGULATION



SPRAY BAR
New spray bar
with nozzles in
fixed position



VENTILATING LOUVERS
New ventilating louvers
in water cooled version



TOP ANGLE
New top plastic
round corners

Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

Model	Voltage	Power Input Watt (*)	Refrigerant Type	Refrigerant Charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SDE 18 AS	230/50/1	280	R134a	0.17	10	1,9	28	33
SDE 18AS	220-240/60/1	280	R134a	0.17	10	1,9	28	33
SDE 18 WS	230/50/1	280	R134a	0.17	10	15,8	28	33
SDE 18 WS	220-240/60/1	280	R134a	0.17	10	15,8	28	33

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water